

Actalyst™ Interactive Digital Signage

Specifications – Models KLR365 and KPR365 for select 65" plasma panels

Physical Specifications

Size


Landscape Orientation 66 3/4" W × 42 1/4" H × 2 3/8" D
(169.5 cm × 107.3 cm × 6.1 cm)

Portrait Orientation 42 1/4" W × 66 3/4" H × 2 3/8" D
(107.3 cm × 169.5 cm × 6.1 cm)

Weight 63 lb. (28.6 kg)

Shipping Size 75 1/2" W × 55 1/4" H × 26" D
(191.8 cm × 140.3 cm × 66 cm)

Shipping Weight 153 lb. (69.4 kg)

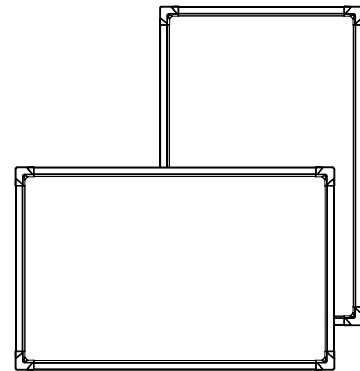

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software Actalyst™ interactive digital signage touch driver software. Software upgrades are available at smarttech.com/software.

Controller You can mount the controller on the back of the interactive overlay with the two included thumbscrews. A modular cable connects the interactive overlay to the controller, and the controller connects to a computer with the included 21' 6" (6.5 m) USB/serial converter cable. The DB9 serial connector connects to the controller, and the USB connector connects to an available USB receptacle on the computer.

Mounting Brackets Four mounting brackets secure the interactive overlay to the flat-panel display with eight No. 8-32 thumbscrews.

Front Surface Material Hard-coated, anti-glare plastic designed for optimal light transmission. Chemical and scratch resistant.

Digitizing Technology DViT™ (Digital Vision Touch) technology uses digital cameras in the top two corners of the interactive overlay to track an object interacting with the display surface.

Power Requirements Switching power supply, 100V to 250V AC, 47 Hz to 63 Hz, 12V DC, 4.2A, 6' (1.8 m) power cord

Power Consumption Up to 40 W

Compliance CE, WEEE, RoHS (Europe), RoHS (China)

Warranty Two-year limited equipment warranty

Installation Notes You can install the interactive overlay on a flat-panel display that is securely mounted to a wall or floor stand. However, the wall mount or floor stand must be able to support a combined weight of 120 lb. (54.4 kg). Because of stability and mechanical fit issues, do not use table stands. You cannot attach speakers directly to the sides of a flat-panel display when an interactive overlay is installed. Do not install Actalyst interactive digital signage where it will be exposed to the weather or direct sunlight.

Computer Requirements

Windows® Computers	Pentium® II 450 MHz processor 128 MB of RAM (256 MB recommended) 60 MB of free hard disk space Windows 2000, Windows XP or Windows Vista™ operating system Internet Explorer® Internet browser 6.0 or later
Mac Computers	700 MHz processor (1 GHz or faster recommended) 97 MB of RAM (256 MB recommended) 75 MB of free hard disk space Mac OS X version 10.4.x operating system software Safari® application program version 1.3.2 or later Supports both PowerPC® and Intel® processors (universal binary)
Linux® Computers	Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 28 MB of free hard disk space Linux kernel version 2.6 or later X Window System™ version 11 release 6 (X11R6) or later (must support XRender, Xinerama™, XFixes, Xau and Xdmcp) glibc 2.3.3 (gcc 3.4.2) libstdc++6 GNOME™ 2.8.0+ or KDE® 3.3+ libraries (recommended) SUSE™ 10, Red Hat® Enterprise Linux 4 WS, Debian® 3.1 (Sarge), Ubuntu® 6.06 LTS or Fedora™ Core 3+

Storage and Operating Specifications


Storage	-40°F to 95°F (-40°C to 35°C) with up to 95% humidity non-condensing
Operation	41°F to 95°F (5°C to 35°C) with up to 90% humidity non-condensing

SMART Order Number


KLR365	Actalyst interactive overlay for select 65" plasma panels in landscape orientation
KPR365	Actalyst interactive overlay for select 65" plasma panels in portrait orientation

Dimensions


Front

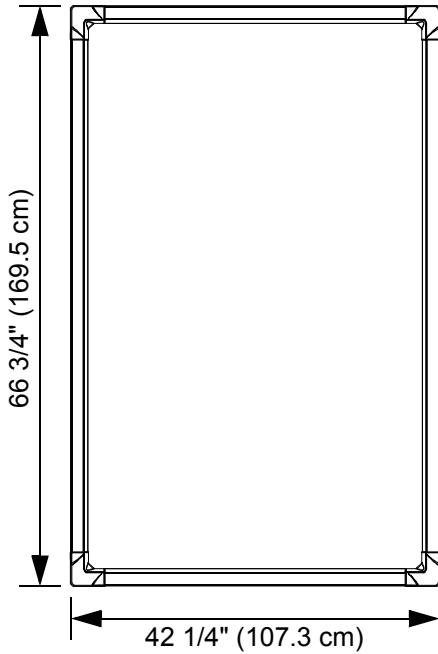

Side

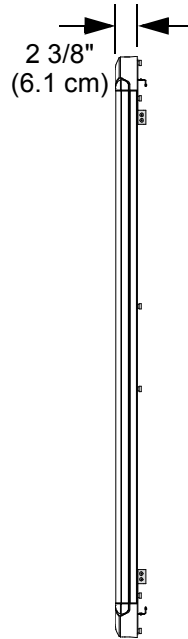

Back

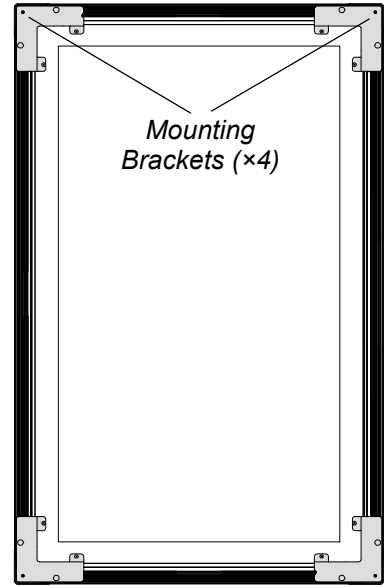

All dimensions +/- 1/8" (0.3 cm).