


Actalyst™ Interactive Digital Signage

Specifications – Model KLX346 for Select 46" Flat-Panel Displays

Physical Specifications

| | |
|------------------------------|---|
| Size | 48 3/4" W × 31 1/4" H × 2 3/8" D (123.8 cm × 79.4 cm × 6.0 cm) |
| Mounting Bracket Size | 44 3/8" W × 6 1/2" H × 3 3/4" to 5 7/8" D (112.7 cm × 16.5 cm × 9.5 cm to 14.9 cm) |
| Weight | 57 lb. (25.9 kg) |
| Shipping Size | 58" W × 47" H × 21" D (147.3 cm × 119.4 cm × 53.3 cm) |
| Shipping Weight | 120 lb. (54.4 kg) |

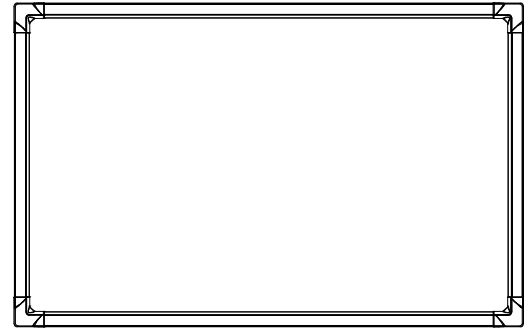

All dimensions +/- 1/8" (3.2 mm). All weights +/- 2 lb. (0.9 kg).

Standard Features

| | |
|-------------------------------|---|
| Software | Actalyst™ interactive overlay touch driver software. Upgrades are available at smarttech.com/software . |
| Controller | You can mount the controller on the back of the interactive overlay with two included thumbscrews. A modular cable connects the interactive overlay to the controller and the controller connects to a computer with the included 21'6" (6.5 m) USB/serial converter cable. The DB9 serial connector connects to the controller and the USB connector connects to an available USB receptacle on the computer. |
| Mounting Bracket | The mounting bracket has an adjustable depth feature to accommodate most 46" flat panels installed in a landscape orientation. |
| Front Surface Material | Hard-coated, anti-glare polyester that's designed for optimal light transmission. Chemical and scratch resistant. |
| Digitizing Technology | DViT™ (Digital Vision Touch) technology uses two digital cameras in the top two corners of the interactive overlay to track an object interacting with the display surface. |
| Power Requirements | Switching power supply, 100V–250V AC, 47 Hz–63 Hz, 12V DC 4.2A, 6' (1.8 m) power cord |
| Power Consumption | Power consumption is up to 40 W. |
| Compliance | CE, WEEE, RoHS (Europe), RoHS (China) |
| Warranty | Two-year limited equipment warranty |
| Installation Notes | You can install the interactive overlay on a flat panel that will be securely mounted to a wall or floor stand. However, the wall mount or floor stand must be able to support a combined weight of 170 lb. (77.1 kg). Because of stability and mechanical fit issues, table stands are not recommended. You cannot attach speakers directly to the sides of a flat panel when an interactive overlay is installed. |

Computer Requirements

| | |
|---------------------------|---|
| Windows® Computers | Pentium® II 450 MHz processor 128 MB of RAM (256 MB recommended) 60 MB of free hard disk space Windows 2000, Windows XP or Windows Vista™ operating system Internet Explorer® Internet browser 6.0 or later |
|---------------------------|---|

Specifications – Model KLX346 for Select 46" Flat-Panel Displays

| | |
|-------------------------|--|
| Mac Computers | 700 MHz processor (1 GHz or faster recommended) 97 MB of RAM (256 MB recommended) 75 MB of free hard disk space Mac OS X version 10.4.x operating system software Safari application program version 1.3.2 or later SMART Board software version 9.7 supports both PowerPC® and Intel® processors (universal binary) |
| Linux® Computers | Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 28 MB of free hard disk space Linux kernel version 2.6 or later X Window System™ version 11 release 6 (X11R6) or later (must support XRender, Xinerama™, XFixes, Xau and Xdmcp) glibc 2.3.3 (gcc 3.4.2) libstdc++6 GNOME™ 2.8.0+ or KDE® 3.3+ libraries (recommended) SUSE™ 10, Red Hat® Enterprise Linux 4 WS, Debian® 3.1 (Sarge), Ubuntu® 6.06 LTS or Fedora™ Core 3+ |

Storage and Operating Specifications

| | |
|------------------|--|
| Storage | -40°F to 95°F (-40°C to 35°C) with up to 80% humidity non-condensing |
| Operation | 41°F to 95°F (5°C to 35°C) with up to 80% humidity non-condensing |

SMART Order Number

| | |
|---------------|--|
| KLX346 | Actalyst interactive overlay for select 46" flat panels in landscape orientation |
|---------------|--|

SMART Technologies

3636 Research Road
Calgary, AB T2L 1Y1
CANADA



www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228-5940 or Toll Free 1.866.518.6791 (Canada/U.S.)

© 2004–2010 SMART Technologies ULC. All rights reserved. Actalyst, DVIT, smarttech and the SMART logo are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Windows and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patents Nos. US5448263; US6141000; US6337681; US6747636; US6803906; US6919880; US6947032; US6954197; US7184030; US7236162; US7289113; US7411575; US7619617; US7626577; US7643006; US7692625; CA2058219; CA2386094; EP1297488; ES2279823; ZL0181236.0; DE60124549; [Other] patents pending. Specifications are subject to change without notice. 07/2010.

Dimensions

