


Specifications

Actalyst™ Interactive Digital Signage

Model KLX352 for Select 52" Flat-Panel Displays

Physical Specifications

Size	55 1/4" W × 35 1/4" H × 2 3/8" D (140.3 cm × 89.5 cm × 6.1 cm)
Weight	73 lb. (33.1 kg)

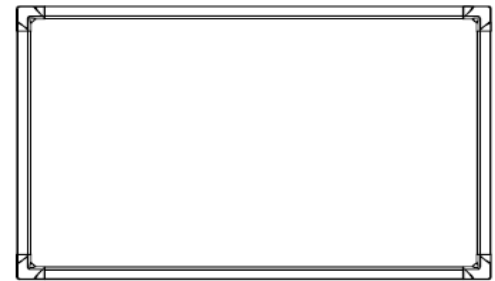

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg)

Standard Features

Software	Actalyst™ interactive overlay touch driver software. Upgrades are available at smarttech.com/software .
Controller	You can mount the controller on the back of the interactive overlay with two included thumbscrews. A modular cable connects the interactive overlay to the controller, and the controller connects to a computer with the included 21' 6" (6.5 m) USB/serial converter cable. The DB9 serial connector connects to the controller, and the USB controller connects to an available USB receptacle on the computer.
Mounting Bracket	The mounting bracket has an adjustable depth feature to accommodate most 52" flat-panel displays installed in a landscape orientation.
Front Surface Material	Hard-coated, anti-glare plastic that's designed for optimal light transmission. Chemical and scratch resistant.

Digitizing Technology	DViT™ (Digital Vision Touch) technology uses digital cameras in the top two corners of the interactive overlay to track an object interacting with the display surface.
Power Requirements	Switching power supply, 100V–250V AC, 47 Hz–63 Hz, 12V DC 4.2A, 6' (1.8 m) power cable
Power Consumption	Power consumption is up to 40 W.
Regulatory Certification	CE
Environmental Compliance	EU RoHS, EU WEEE, EU REACH, EU Packaging, EU Battery and Accumulator, US CPSIA, US Toxics in Packaging, China EIP
Warranty	Two-year limited equipment warranty
Installation Notes	You can install the interactive overlay on a flat-panel display that will be securely mounted to a wall or floor stand. However, because of stability and mechanical fit issues, do not use a table stand. You're unable to attach speakers directly to the sides of a flat-panel display when you install an interactive overlay.

Computer Requirements

Windows® Computers	Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 60 MB of free hard disk space Windows 2000, Windows XP or Windows Vista™ operating system Internet Explorer® internet browser 6.0 or later
Mac Computers	700 MHz processor (1 GHz or faster recommended) 97 MB of RAM (256 MB recommended) 75 MB of free hard disk space Mac OS X version 10.4.x operating system software Safari application program version 1.3.2 or later SMART Board software version 9.7 or later supports both PowerPC® and Intel® processors (universal binary)
Linux® Computers	Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 28 MB of free hard disk space Linux kernel version 2.6 or later X Window System version 11 release 6 (X11R6) or later (must support XRender, Xinerama, XFixes, Xau and Xdmcp) glibc 2.3.3 (gcc 3.4.2) libstdc++6 GNOME™ 2.8.0+ or KDE® 3.3+ libraries (recommended) SUSE™ 10, Red Hat® Enterprise Linux 4 WS, Debian® 3.1 (Sarge), Ubuntu® 6.06 LTS or Fedora™ Core 3+

Storage and Operating Specifications


Storage	-40°F to 95°F (-40°C to 35°C) with up to 80% humidity (non-condensing)
Operation	41°F to 95°F (5°C to 35°C) with up to 80% humidity (non-condensing)

**3 | SPECIFICATIONS – ACTALYST INTERACTIVE DIGITAL SIGNAGE – MODEL
KLX352 FOR SELECT 52" FLAT-PANEL DISPLAYS**

SMART Order Number

KLX352 Actalyst interactive overlay for select 52" flat panel displays in landscape orientation

Physical Dimensions

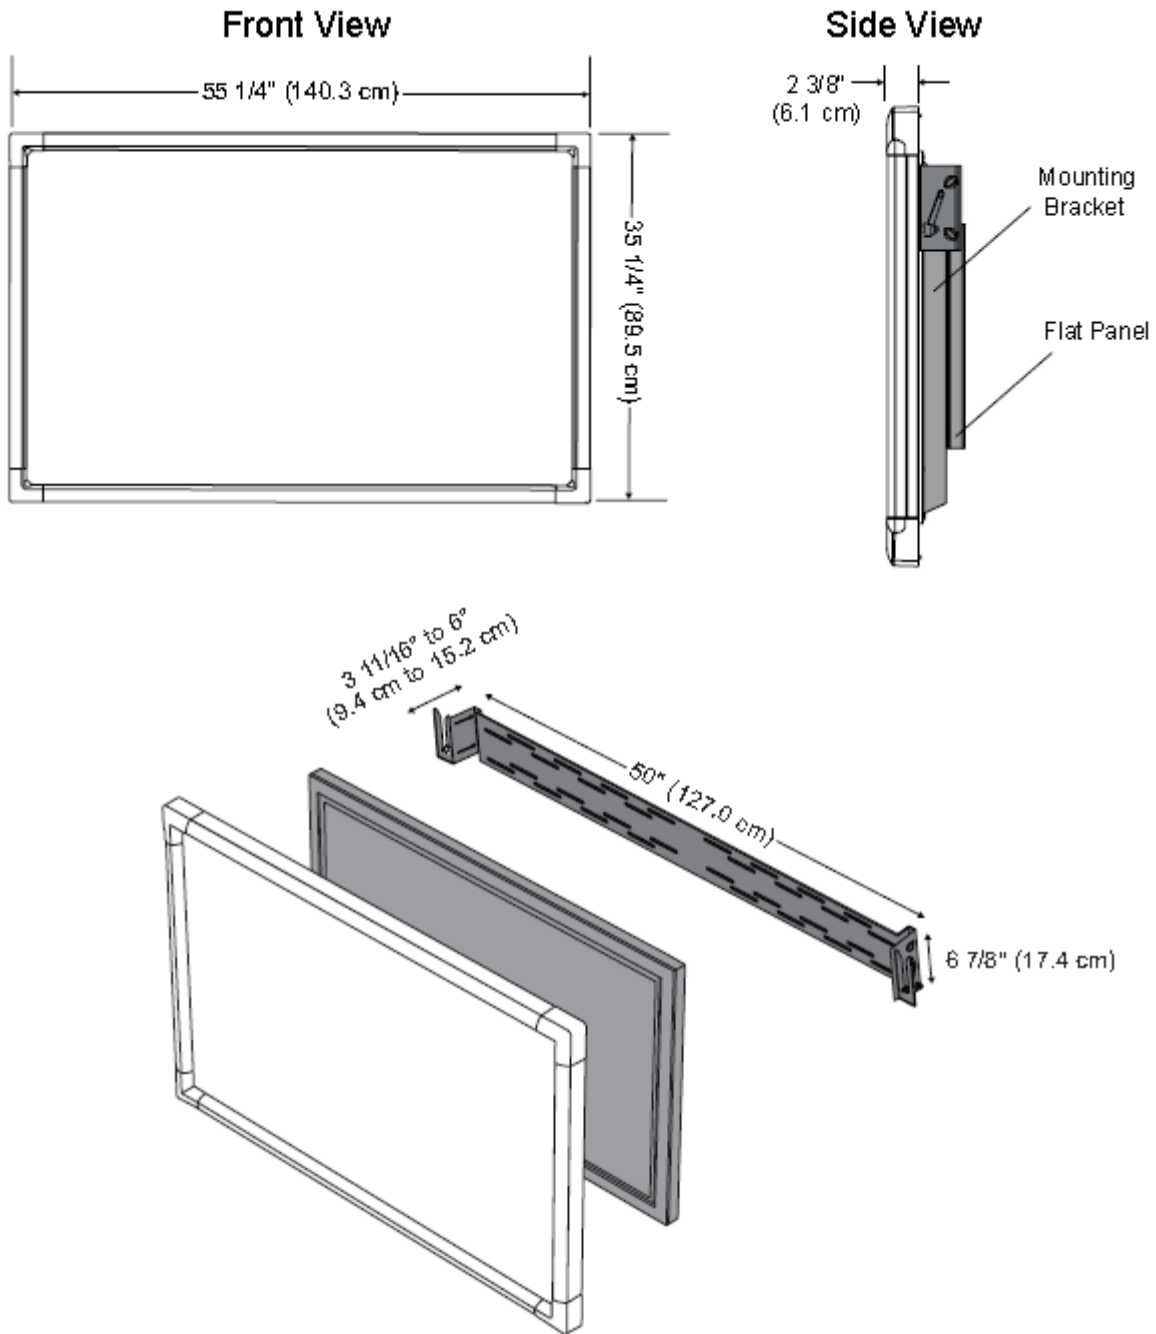

www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)

SMARTTM

©2010 SMART Technologies ULC. All rights reserved. Actalyst, DVIT, the SMART logo and smarttech are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US5448263; US6141000; US6337681; US6747636; US6803906; US6919880; US6947032; US6954197; US7184030; US7236162; US7289113; US7411575; CA2058219; CA2386094; EP1297488; ES2279823; ZL0181236.0; and DE60124549. Other patents pending. Contents are subject to change without notice. 07/2010.