

SMART Chromebox G3

Model SCBOX-CEL-4

Overview


The SMART Chromebox G3 can be connected to a compatible SMART Board® interactive display to provide teachers with a dedicated Chrome OS™ device they can use with their displays.

This benefits teachers who use G Suite as it seamlessly integrates the display with the apps and programs they use every day to teach their students. Teachers will no longer need to have a Chromebook and figure out how to connect it to the display.

See smarttech.com for more information on this product.

Dimensions and weights¹

Dimensions

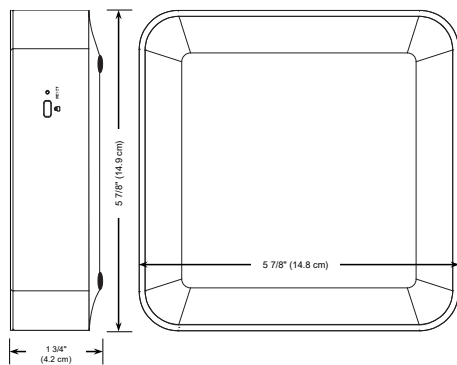

Weight

1 lb. 7 oz. (0.65 kg)

Shipping dimensions

10 3/4" × 5 1/4" × 7 1/2"

27.5 cm × 13.3 cm × 18.7 cm

Shipping weight

2 lb. 10 oz. (1.2 kg)



As an ENERGY STAR® certified computer, the SMART Chromebox G3 meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Operating system	Chrome OS
SMART software	No SMART software is required to be installed on the Chromebox. The software required to enable touch is built in to the SMART Board interactive display's firmware. Inking can be used in supported applications, or when the display's freeze frame function has been enabled.
Processor	CPU Intel Celeron 3865U Dual Core 1.8GHz BGA 2MB L3 HD 610
Memory (RAM)	4G DDR4, 2 slots
Memory type	2133 DDR4 SODIMM (DDR4-2133)
Storage	SSD 128G 2242 type
LAN	Gigabit
Networking	10 / 100 / 1000M GbE LAN
WLAN and Bluetooth	802.11ac, BT Combo (2x2) Intel Stone Peak 2 D1 7265 ac 2x2 +Bluetooth 4.2 M.2 non-vPro PCI-e WW with 2 antennas 802.11ac, BT Combo (2x2)
Wi-Fi capability	Yes
VESA mounting	100 x 100 mm
Included cables	1xPower adapter 1xUS-type power cord (length 1m)
Other required cables (not included)	1xUSB-A to USB-B 1xHDMI
Security solution	Kensington lock

Connectors

Front	1×Audio jack (3.5mm) 2×USB type-A 3.0 ports 1×MicroSD™ card reader
Back	1×LAN port 1×USB 2.0 ports 1×USB 3.0 port 2×HDMI port 1×DC-in jack 1×USB type-C port

Storage and operating requirements

Voltage	19V
AC Adapter	65W
Input	100 to 240V AC, 50 Hz to 60 Hz
Output	19V DC, 3.42A
Operating temperature	32°F to 95°F (0°C to 35°C)
Humidity	30–80%

Certification and compliance (Model ID: SCB-1)

Regulatory certification

U.S. / Canada	FCC, ISED, UL, CONEG Packaging, California Proposition 65, Conflict Minerals
EU / EEA / EFTA	CE - CB, RED, REACH, RoHS, WEEE, Battery and Packaging Directives; REACH and POP Regulations
Australia / New Zealand	RCM

Compatible SMART Board interactive displays

Display	Models
SMART Board 7000R and 7000R Pro	<ul style="list-style-type: none">• SBID-7075R• SBID-7086R• SBID-7275R• SBID-7286R• SBID-7075R-P• SBID-7086R-P• SBID-7275R-P• SBID-7286R-P
SMART Board 7000 and 7000 Pro	<ul style="list-style-type: none">• SBID-7275-V2• SBID-7286-V2• SBID-7075• SBID-7086• SBID-7275• SBID-7286• SBID-7075P-V2• SBID-7086P-V2• SBID-7275P-V2• SBID-7286P-V2• SBID-7075P• SBID-7086P• SBID-7275P• SBID-7286P
SMART Board MX (V2)	<ul style="list-style-type: none">• SBID-MX265-V2• SBID-MX275-V2• SBID-MX286-V2
SMART Board 6000S and 6000S Pro	<ul style="list-style-type: none">• SBID-6265S• SBID-6275S• SBID-6286S• SBID-6265S-P• SBID-6275S-P• SBID-6286S-P

Purchasing information

Order numbers

1034128 SMART Chromebox G3

Warranty

Warranty 3-year Limited Equipment Warranty. See <https://www.smarttech.com/warranty>

[smarttech.com/support](https://www.smarttech.com/support)
[smarttech.com/contactsupport](https://www.smarttech.com/contactsupport)

© 2022 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. April 28, 2022.