


SMART Board™ for Flat-Panel Displays Interactive Whiteboard

Specifications – Model PN357 for the 57" NEC MultiSync LCD5710 Liquid Crystal Display

NOTE: For a complete list of supported flat panels, visit www.smarttech.com/products/overlay/specs.asp.

Physical Specifications

| | |
|-------------------------------|---|
| Interactive Whiteboard | 58 1/8" W × 36 5/8" H × 2 3/8" D (147.6 cm × 93.0 cm × 6.0 cm) |
| Pen Tray | 3 5/8" (9.2 cm) added to the interactive whiteboard's height 2" (5.1 cm) added to the interactive whiteboard's depth |
| Weight | 60 lb. (27.2 kg) |
| Shipping Size | 71" W × 62" H × 43" D (180.3 cm × 157.5 cm × 109.2 cm) |
| Shipping Weight | 136 lb. (61.7 kg) |

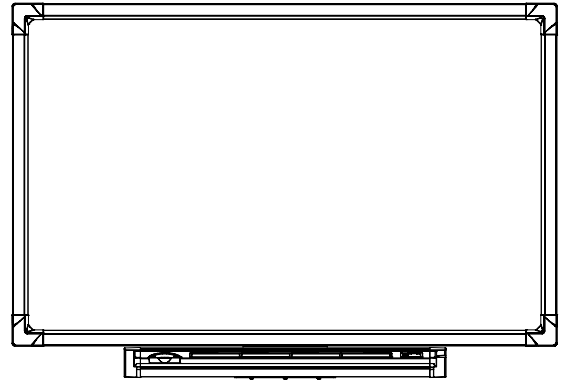

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software

SMART Notebook software included. See the [SMART Notebook software specifications](#) for a complete list of system requirements. Software upgrades are available at www2.smarttech.com/st/en-US/Support/SBS/.

Pen Tray

Optical sensors in the pen tray detect when a pen or eraser is lifted from the tray. LED indicators show the active tool. Includes four pen tray pens (black, blue, red and green) and an eraser. The pen tray connects to the interactive whiteboard with a modular cable and connects to a computer with a 21' 6" (6.5 m) USB/Serial Adapter cable. The USB/Serial Adapter cable has a DB9F connector at one end and a USB connector at the other. An optional serial cable is available.

NOTE: To order the interactive whiteboard without the pen tray, add "NP" to the end of the model number. The pen tray is then replaced by an electronic controller that fastens behind the overlay.

Mounting Brackets

Four mounting brackets secure the interactive whiteboard to the liquid crystal display with eight No. 8-32 thumbscrews.

Front Surface Material

Hard-coated, anti-glare polyester designed for optimal light transmission. Chemical and scratch resistant.

Digitizing Technology

DViT™ (Digital Vision Touch) technology uses digital cameras to track an object interacting with the display surface.

Power Requirements

Switching power supply, 100V–250V AC, 47 Hz–63 Hz, 12V DC, 4.2A, 6' (1.8 m) power cord

Power Consumption

Power consumption is up to 40 W.

Certifications and Compliance

CE, WEEE, RoHS (Europe), RoHS (China)

Warranty

Two-year limited equipment warranty

Installation Notes

You can install the interactive whiteboard on a liquid crystal display that is securely mounted to a wall or floor stand. However, because of stability and mechanical fit issues, table stands are never to be used. You cannot attach speakers directly to the sides of a liquid crystal display when an interactive whiteboard is installed.

Storage and Operating Specifications

Storage -40°F to 95°F (-40°C to 35°C) with up to 80% humidity non-condensing

Operation 41°F to 95°F (5°C to 35°C) with up to 80% humidity non-condensing

SMART Order Number

PN357 Interactive whiteboard for the 57" NEC MultiSync LCD5710 liquid crystal display


PN357NP Overlay without pen tray for the 57" NEC MultiSync LCD5710 liquid crystal display

93-00360 Optional 20' (6.1 m) straight-through DB9F-to-DB9F serial cable for systems that don't support USB connections. Must be ordered separately.


Specifications – Model PN357 for the 57" NEC MultiSync LCD5710 Liquid Crystal Display

All dimensions +/- 1/8" (0.3 cm)


Front View

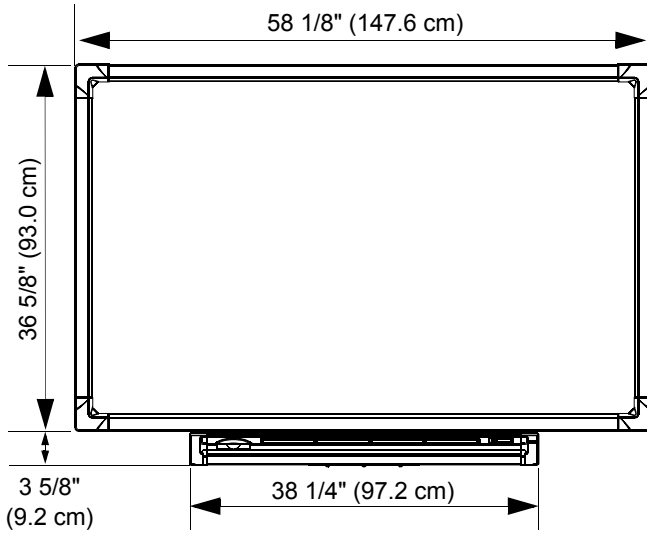

Back View

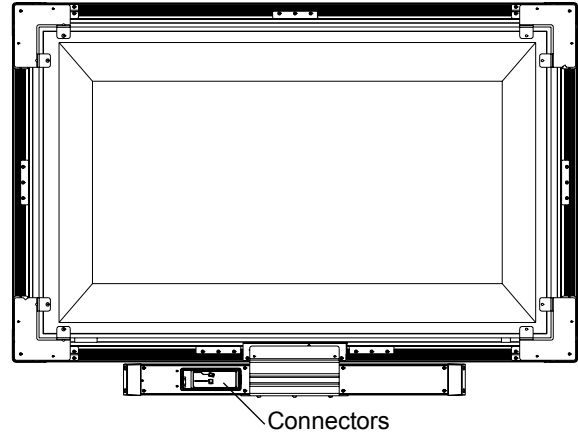

Side View

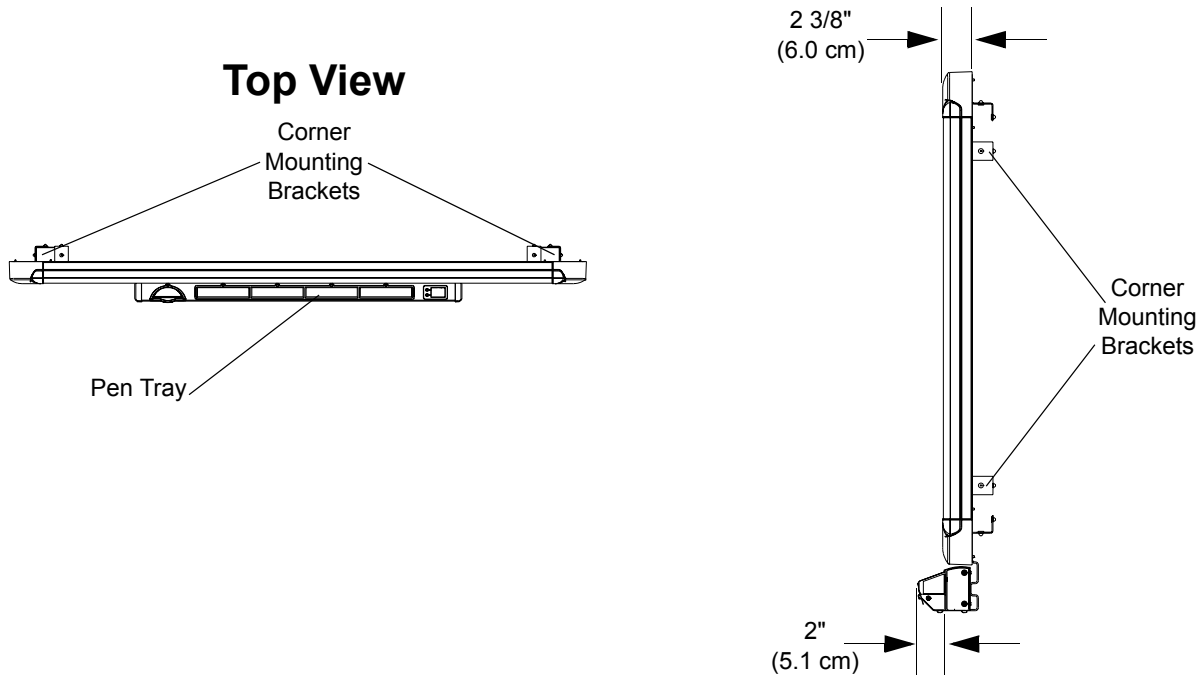

www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)

© 2008 SMART Technologies ULC. All rights reserved. The SMART logo, SMART Board and smarttech are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All other third-party product and company names may be trademarks of their respective owners. Patent No. US5448263; US6141000; US6320597; US6326954; US6337681; US6741267; US6747636; US6803906; US6919880; US6947032; US6954197; US6972401; US7151533; US7184030; US7236162; CA2058219; CA2453873; EP1297488; ES2279823; ZL0181236.0; and DE60124549. Other patents pending. Contents are subject to change without notice. 08/2008

SMART
Technologies