

Specifications

SMART Board® interactive whiteboard system

Model SB685i6


Overview

Your SMART Board® 685i6 interactive whiteboard system combines the use of a SMART Board 600 series interactive whiteboard and a the SMART UF70w projector along with other accessories and optional equipment.

The SMART UF70w projector provides an ultra-bright high resolution image on a short boom delivering high definition, high performance interactivity that is virtually shadow-free and glare-free. You can do everything you can do at your computer—open and close applications, meet with others, create new documents or edit existing ones, visit websites, play and manipulate video clips and more— just by touching the interactive surface. The SB685 series interactive whiteboard is a single user one touch system that provides unmatched durability and unceasing performance under any conditions.

The SB685i6 system supports video and audio from a variety of devices including DVD and Blu-ray™ players, document cameras, and other high-definition sources, and is displayed on the interactive screen. All HDMI 1.4 inputs are HDCP compliant

See smarttech.com for more information on this product.

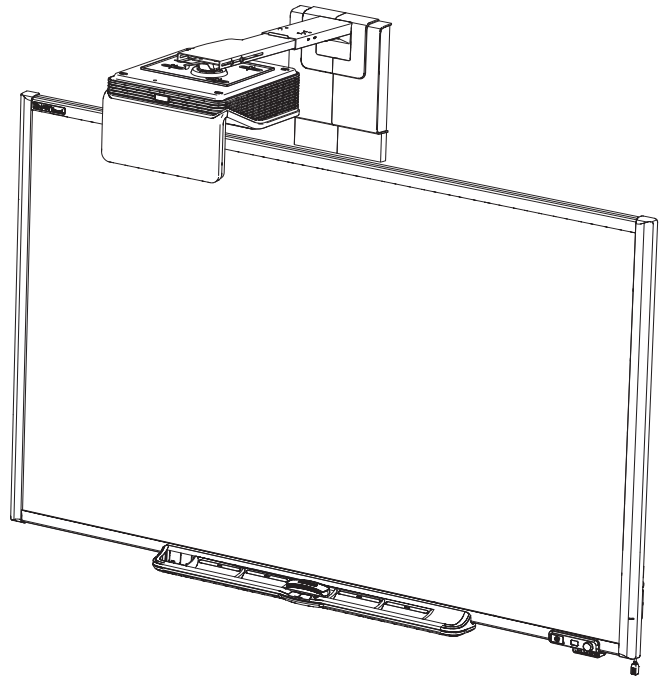


SPECIFICATIONS

SMART Board® interactive whiteboard system – Model SB685i6

Dimensions and weights¹

Dimensions

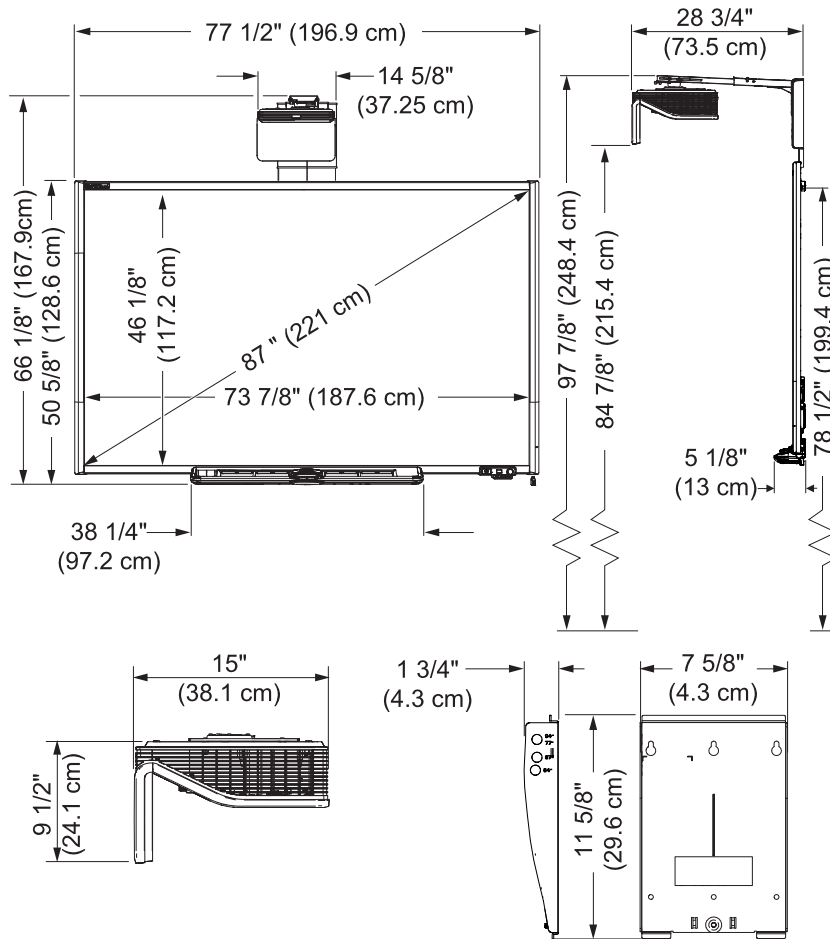

SMART Board 685 interactive whiteboard

Weight

42 lb. (19.1 kg)

Shipping dimensions

54" W × 86.1/4" H × 5 1/2" D
(137.2 cm × 219.1 cm × 14 cm)

Shipping weight

63 lb. (28.6 kg)

SMART UF70w projector

Weight (projector only)

16.7 lbs (7.6 Kg)

Weight (projector + boom)

28.4 lbs (12.9 Kg)

Shipping weight

35.8 lbs. (16.2 kg)

Projector dimensions

14 5/8" W × 9.5" H × 28 3/4" D
(37.1 cm × 24.1 cm × 73 cm)

Shipping dimensions

20" W × 15 1/2" H × 24" D
(50.8 cm × 39.4 cm × 61 cm)

Extended control panel (ECP)

Dimensions

6" W × 2 5/8" H × 2 1/4" D
(15.2 cm × 6.6 cm × 5.8 cm)

Weight

4.5 lbs (2.1 kg)

Shipping dimensions

9.3" W × 5" H × 10 3/8" D
(23.8 cm × 12.8 cm × 26.4 cm)

Remote Control

Dimensions

1 5/8" W × 3 3/8" H × 1/4" D
(4.1 cm × 8.6 cm × 0.6 cm)

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Hardware

Projector

| | |
|--------------------------------------|--|
| Brightness (standard) | 3000 lumens 230 W mode at a CCT of 6500 K by the IEC method |
| Brightness (economy) | 2250 lumens 190 W mode. at a CCT of 6500 K by the IEC method |
| Native resolution | WXGA 1280 × 800 |
| Aspect ratio | 16:10 with support for 16:9, and 4:3 and 5:4 ratio with scaling |
| Throw ratio | Short throw 0.35:1 ratio |
| Throw distance | 25.75" (65.5 cm) |
| Display technology | The projection engine uses DLP® technology by Texas Instruments™, providing BrilliantColor™ performance and quality Gamma 2.2 correction with Bright Room, Dark Room, sRGB, User and SMART Presentation modes. |
| Lamp life | 3000 hours in Standard 230 W mode. 4000 hours in Economy 190 W mode. |
| Integrated loud speaker | 9 W rms |
| Projector noise | 32 dBA standard fan speed and 37dBA high fan speed |
| Contrast ratio (typical) | 2900:1 |
| Video system compatibility | HDTV (720p and 1080p) video system compatibility and HD Ready (HDMI technology and 720p) available, NTSC, NTSC 4:43, PAL, PAL-N, PAL-M and SECAM (480i/p and 576i/p) |
| Video interface compatibility | HDCP compliant HDMI, Composite, VESA® RGB with additional interface support for Component YPbPr and Component YCbCr inputs with the proper adapters (not included) |
| Horizontal frequency | 15 kHz–72 kHz |
| Vertical frequency | 15 Hz–75 Hz |
| Clock frequency | 165 Mhz |
| External management | IR Remote, RS232 control port, internal web page, Crestron® RoomView® management via Ethernet |



Interactive whiteboard

| | |
|-------------------------------------|--|
| Touch resolution | 4000 × 4000 |
| Touch | Robust single touch system |
| Digitizing technology | Resistive technology |
| Pen tray | Optical sensors in the pen tray light to indicate the active tool. |
| Accessories | Four ergonomic pens with comfort grip and rectangular eraser |
| Extended Control Panel (ECP) | SB685i6 - included with the system. |

SPECIFICATIONS

SMART Board® interactive whiteboard system – Model SB685i6

| | |
|---|---|
| Included cables and hardware SB685i6 | 14' 9" (4.5 m) power cable Infrared remote control 16' 5" (5 m) USB cable 13' 5.5" (4.1 m) 3.5 mm stereo audio cable Projector wiring harness |
|---|---|

| | |
|-------------------------|--|
| Theft protection | Projector system padlock ring SB600 system - Kensington security slot |
|-------------------------|--|

Connectors

| | |
|-----------------------------|---|
| Projector connectors | 3.5 mm phone jack audio input 3.5 mm phone jack audio output DB15F RGB VGA video input n(VGA In) DB15F RGB VGA video input n(VGA Out) DB9F RS-232 control port HDMI 1.4 input Power (100V–240V AC at 50 Hz–60 Hz) USB-B port - for service use only Cat 5- ethernet cable 7-pin mini-DIN for ECP data 4-pin mini-DIN 5V/2A output for ECP USB HUB/switch power RCA analog audio and composite video (red, white and yellow) Microphone 3.5 mm |
|-----------------------------|---|

| | |
|-----------------------|--|
| ECP connectors | RJ11 6-wire SMART Hub™ SE collaboration platform DB15-M ECP harness cable to projector RCA (×3) Composite video and associated audio inputs USB A SMART Board 685 interactive whiteboard USB A (×3) USB drives or peripheral devices (not included) USB B Primary computer (desktop label) USB B Secondary computer (laptop label) |
|-----------------------|--|

Computer requirements

| | |
|----------------|---|
| SB685i6 | Windows® operating system or Mac operating system software and SMART Notebook software installed. For a complete list of computer requirements, go to Smarttech.com/downloads and browse to the latest SMART Notebook release notes applicable to your operating system. |
|----------------|---|

Storage and operating requirements

| | |
|---|-----------------------------|
| Power requirements and consumption | 100V–240V AC at 50 Hz–60 Hz |
| Full mode | 360 W |
| ECO mode | 360 W |
| Standby mode | 0.5 W |

Operating temperature

Interactive whiteboard 41°F to 95°F (5°C to 35°C) from 0' to 6000' (0 m to 1800 m)
41°F to 86°F (5°C to 30°C) from 6000' to 9800' (1800 m to 3000 m)

Projector Standard speed: 41°F to 95°F (5°C to 35°C) from 0' to 6000' (0 m to 1800 m)
High speed: 41°F to 86°F (5°C to 30°C) from 6000' to 6800' (1800 m to 2100 m)

Storage temperature -4°F (-20°C) to 122°F (50°C)

Humidity Up to 80% storage relative humidity, non-condensing
Up to 80% operating relative humidity, non-condensing

Certification and compliance

Regulatory certification CB, CCC, CE, C-Tick, FCC, KC, GOST-R, NOM, PSB, PSE, SASO, TUV-GS, UL/CSA (US/Canada) and VCCI

Environmental compliance

China EIP

European Union REACH, RoHS, WEEE, Battery, Packaging and ErP Standby

U.S. Packaging and Conflict Minerals

Warranty

Interactive whiteboard Two-year limited equipment warranty OR
Five-year limited equipment warranty upon registration

Projector Two-year limited equipment warranty

Projector lamp 1000-hour/one-year warranty

ECP Two-year limited equipment warranty

Purchasing information**Order numbers**

SB685i6 87" (221 cm) diagonal SMART Board interactive whiteboard with a SMART UF70w projector system. Includes a SMART Notebook software installation DVD.

1020991 Replacement lamp for SMART UF70 and UF70w projectors

1013576 Projector hardware kit smarttech.com/kb/160505

Optional extended warranty

(EWY2-UF70W) UF70w two-year warranty extension
(available at time of projector purchase only)

Optional accessories See smarttech.com/accessories

SPECIFICATIONS

SMART Board® interactive whiteboard system – Model SB685i6

smarttech.com/support

smarttech.com/contactsupport

© 2013 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof covered by one or more of the following U.S. patents. www.smarttech.com/patents. Contents are subject to change without notice. 06/2013.