

Symposium™ Interactive Pen Display

Specifications – Model ID250

Physical Specifications

Size	Without Tilt Stand	15 3/4" W × 13 3/8" D × 2" H (40.0 cm × 34.0 cm × 5.1 cm)
	With Tilt Stand (Lowest Position)	15 3/4" W × 12 5/8" D × 4 7/8" H (40.0 cm × 32.1 cm × 12.4 cm)
	With Tilt Stand (Highest Position)	15 3/4" W × 8 3/4" D × 12 1/2" H (40.0 cm × 22.2 cm × 31.8 cm)
Display Area		15" (38.1 cm) diagonal
Weight	With Tilt Stand	9 lb. (4.1 kg)
Shipping Size		20" W × 18" D × 9" H (50.8 cm × 45.7 cm × 22.9 cm)
Shipping Weight		17 lb. (7.7 kg)

All dimensions +/- 1/8" (3.2 mm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software	SMART Board™ software and Notebook™ software. Free software upgrades are available at www.smarttech.com/support/software/index.asp .
Tilt Stand	The tilt stand allows you to adjust the tilt angle of the console from a minimum position of 18° from the horizontal to a maximum position of 73° from the horizontal.
Mounting Arm Option	You can remove the tilt stand and attach a 3" (7.5 cm) VESA standard LCD mounting arm (not supplied)
Cables	7' (2.1 m) HD DB15 (M-M) and 6'6" (2.0 m) USB (A-B) cables
Power Supply	Input: 100V–230V AC 60/50 Hz. Output: 12V DC, 3.3A
Power Management	VESA DPMS, Energy Star
Power Consumption	Normal operation: < 45 W (LED glows blue). Off/Suspend/Standby mode: < 5 W (LED glows blue/orange)
Plug and Play	DDC2B, EDID 1.3
Certifications	CSA (Canada/U.S.)/CE
Warranty	Two-year limited warranty

Interactive Pen Display Features

Screen	a-Si TFT active-matrix LCD display
Screen Type	Electromagnetic technology
Communication Interface	USB 1.1 (low speed, 1.5 Mbps)
Resolution	70 Hz max.: native XGA (1024 × 768), scaled SVGA (800 × 600) and VGA (640 × 480) 75 Hz max.: scaled SVGA (800 × 600) and VGA (640 × 480)
Synchronization Range	Horizontal: 30 KHz–56.5 KHz Vertical: 50 Hz–70 Hz NOTE: Some Macintosh computers transmit video signals outside the 50 Hz–70 Hz synchronization range. These models cannot be used with the Symposium interactive pen display.
Viewing Angle	Horizontal 120° and vertical 100° (typical)
Color Depth	24-bit color (16,777,216)
Contrast Ratio	350:1 (typical)
Brightness	Luminance of 230 cd/m ² (typical)
Input Video Signal	Analog 0.7 Vp-p positive at 75 ohm
Auto Adjustment	Less than 2 seconds
Display Response Time	30 microseconds
On-Screen Display Control	Brightness, contrast, pitch, phase, vertical position, horizontal position, language, back light, menu position, reset and color temperature (9300°K / 6500°K / 5000°K / User / Direct).

Tablet Features

Pen-Tool Buttons	Five buttons for controlling pen behavior: Left-Click, Eraser, and Black Ink, Blue Ink and Red Ink
Function Buttons	Five function buttons: Right-Click, Floating Tools, Notebook Software, Screen Capture and Keyboard
Technology	Electromagnetic resonance technology with USB interface
Pen	Battery-free, tethered pen with built-in holder
Pen Report Rate	100 points per second

Specifications – Model ID250

Storage and Operating Specifications

Storage	14°F to 140°F (-10°C to 60°C) with 20% to 90% humidity, non-condensing
Operation	41°F to 95°F (5°C to 35°C) with 20% to 80% humidity, non-condensing

SMART Board Software 9.5 Computer Requirements

Windows® Computers	Pentium® II 450 MHz processor 128 MB of RAM (256 MB recommended) 136 MB of free hard disk space for minimum installation (511 MB for full installation with Gallery collections) Windows NT® 4.0 (SP6), Windows 98 operating system or later Microsoft Internet Explorer® 6.0 or later Macromedia® Flash® player version 8
---------------------------	---

NOTE: The AirLiner™ wireless slate requires the Windows 2000 or Windows XP operating system.

Requirements for SMART Video Player

Pentium II 450 MHz processor (700 MHz or faster recommended)
Windows 98 operating system or later. Does not run on the Windows NT operating system.
Microsoft® DirectX® technology 8.1 or later

Mac Computers

700 MHz processor (1 GHz or faster recommended)
128 MB of RAM (256 MB recommended)
Mac OS X versions 10.3.9 and 10.4.x
148 MB of free hard disk space for minimum installation (423 MB for full installation with Gallery collections)
Available powered USB port
Safari 1.3.2 or later
SMART Board software version 9.5 supports Intel processors (Universal Binary)

NOTE: Previous versions of SMART Board software are compatible with earlier versions of the Mac OS X operating system. To download a previous version of SMART Board software, go to www.smarttech.com/support/software/sb_mac_other.asp.

SMART Order Number


SSID250	Symposium ID250 interactive pen display
----------------	---

SMART Technologies Inc.
1207 – 11 Avenue SW, Suite 300
Calgary, AB T3C 0M5
CANADA
Phone +1.403.245.0333
Toll Free 1.888.42.SMART (Canada/U.S.)
info@smarttech.com www.smarttech.com


SMART
Technologies

Symposium™ Interactive Pen Display


Specifications – Model ID250

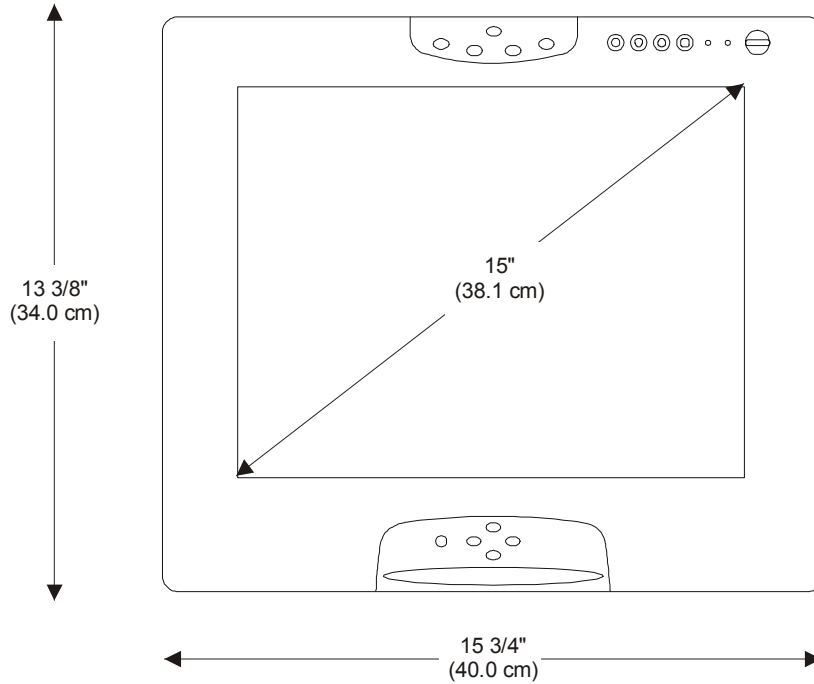

Front View

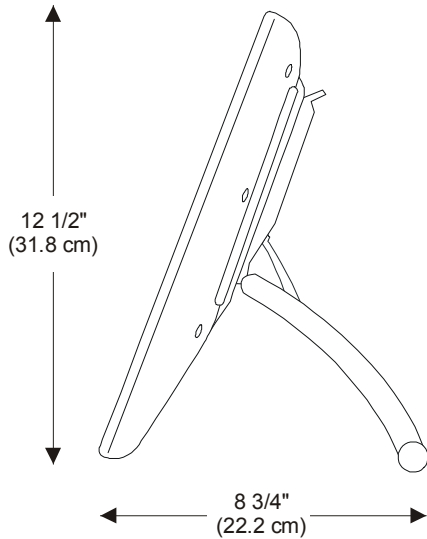

Side View
(Tilt Stand in Highest Position)

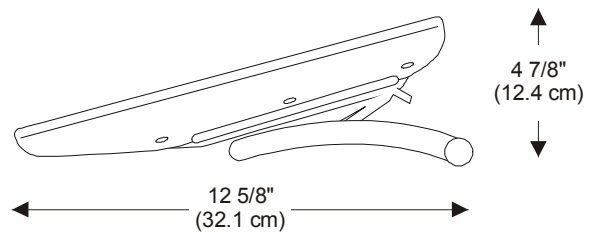

Side View
(Tilt Stand in Lowest Position)


All dimensions are +/- 1/8" (3.2 mm)



Symposium™ Interactive Pen Display

Specifications – Model ID250

Rear View

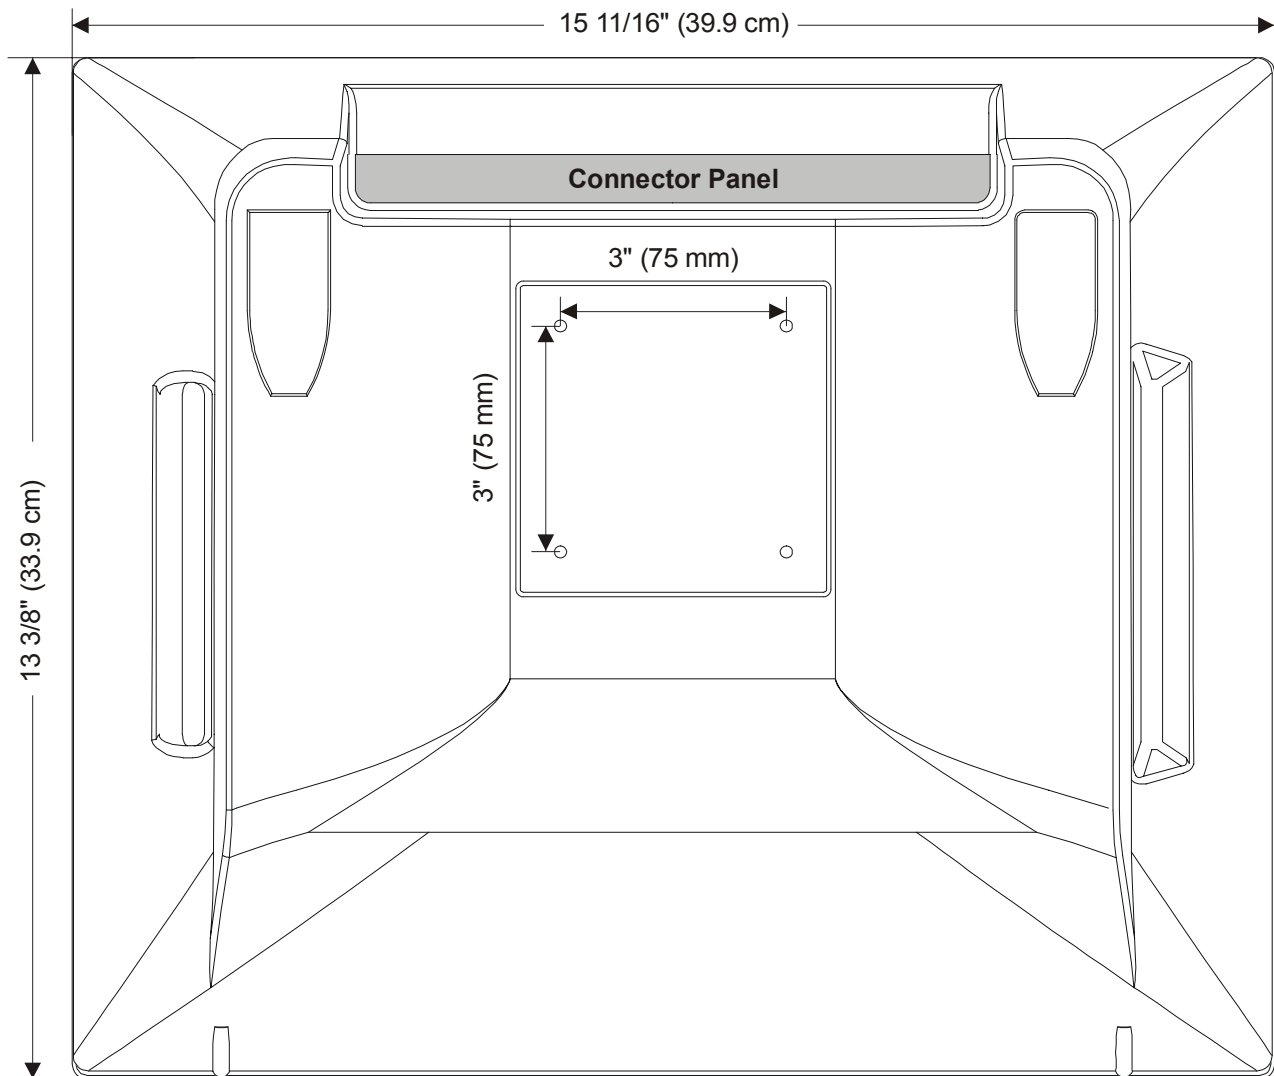

All dimensions are +/- 1/8" (3.2 mm)

