



SMART Board® Mini 727 interactive podium



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE

Display	
Screen size (diagonal)	27"
Backlight	LED
Aspect ratio	16:9
Maximum display resolution	4K UHD (3840 × 2160)
Refresh rate	60 Hz
Brightness	500 cd/m ²
Glass	Optically bonded Anti-glare Anti-fingerprint
Display response time	14 ms
Viewing angle	178°
Frame color	Black
Sensors	Ambient light
Audio	Integrated enhanced 6 W speakers (×2) Integrated eight-microphone array with built-in acoustic echo cancellation

Interactive experience	
Touch technology	PCAP
Touch features	Palm rejection
Minimum object size	≥1.5 mm
Multi-touch capability	10 points
Tools included	Stylus
Tool holders	Magnetic holder, left and right

Stylus	
Stylus technology	Microsoft Pen Protocol (MPP 2.0)
Stylus type	Active
Pressure sensitivity	4096 levels of pressure
Button	Mouse right-click function
Fine eraser	Yes
Indicator light	Charging Status
Material	Black aluminum
Charging	In-bezel charging

Camera	
Resolution	4K UHD (3840 × 2160)
Frame rate	30 Hz @ 4K resolution
Field of view	118°
Aspect ratio	16:9
Tilt range	-16–90°
Auto-focus	Yes
Auto-framing	Yes (user-controllable)
Digital zoom	5× ePTZ
Privacy shutter	Integrated privacy shutter

PC computing	
SMART OPS Modules	SMART PCM modules or AM60 appliance
OPS power	65 W
More information	See > smarttech.com/accessories

Inputs	Side
OPS PC accessory slot	1
HDMI 2.1 4K @ 60 Hz with HDCP 1.4 and HDCP 2.3	1
USB Type-C 4K @ 60 Hz Display Port 1.4a, HDCP 2.3, USB 2.0 (UFP) for touch and audio, USB 3.0 (DFP) for peripherals, 65 W power delivery	1
USB 3.0 Type-A	2
USB 3.0 Type-B for touch ingest and peripherals	1
RJ45 (LAN IN)	1

Outputs	Side
HDMI 2.1 4K @ 60 Hz with HDCP 1.4 and HDCP 2.3	1
USB Type-C 4K @ 60 Hz Display Port 1.4a, HDCP 2.3 and HDCP 1.3, USB 2.0 (UFP) for audio, USB 2.0 (DFP) for touch ingest and peripherals	1
Stereo 3.5 mm (variable)	1

Included cables and accessories	Qty
Power adapter with country-specific cable	1
10' (3 m) USB 2.0 Type-A-to-B cable	1
6' (1.8 m) USB Type-C	1
VESA mounting plate	1
VESA plate mounting screws	2
Stylus with fine eraser and tether	1
Replacement nibs	4
4K camera	1
Camera security screws	2
Remote control	1
AAA batteries	2
Illustrated installation instructions	1
Important information document	1

Connectivity

Wired RJ45 (x1), 1000BASE-T, pass-through

Cable requirements

See > [SMART cables and connectors guide](https://docs.smarttech.com/kb/171926)
(docs.smarttech.com/kb/171926)

Storage and operating requirements

Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Operating temperature	41–95°F (5–35°C)
Storage temperature	–4–140°F (–20–60°C)
Humidity	20–90% relative humidity, non-condensing

Power consumption

Typical	< 50 W
Standby	< 0.5 W

Security

Security feature	Kensington® Security Slot
-------------------------	---------------------------

Certification and compliance

Regulatory models	SP7-1
US / Canada	cULus FCC ISED TSCA CONEG Packaging Proposition 65
EU / EEA / EFTA / UK	CE LVD CB EMC REACH RoHS Battery WEEE Packaging POP Ecodesign
Australia / New Zealand	RCM
Performance standards	ENERGY STAR® HDMI HDCP
Energy label	See > eprel.ec.europa.eu/qr/2379427

Purchasing information

Order number:	SMART Board Mini 727 interactive podium SIP-727
Order number:	SMART Board Mini 727 interactive podium with OPS PC, PCMi5 with SMART Meeting Pro® - bundle SIP-727-PCMi5
Order number:	SMART Board Mini 727 interactive podium with OPS PC, PCMi7v with SMART Meeting Pro - bundle SIP-727-PCMi7
Order number:	SMART Board Mini 727 interactive podium with iQ appliance, AM60 - bundle SIP-727-AM60

Optional accessories

Other accessories	See smarttech.com/accessories
--------------------------	---

SMART Warranty

Terms and conditions and warranty upgrade options vary by region. Visit smarttech.com/warranty or contact your reseller for information.


Installation, dimensions, and weights

Notes

- All dimensions ± 0.3 cm. All weights ± 0.9 kg.
- Product ships upright.
- Leave space around the display to ensure adequate ventilation

SIP-727

Dimensions

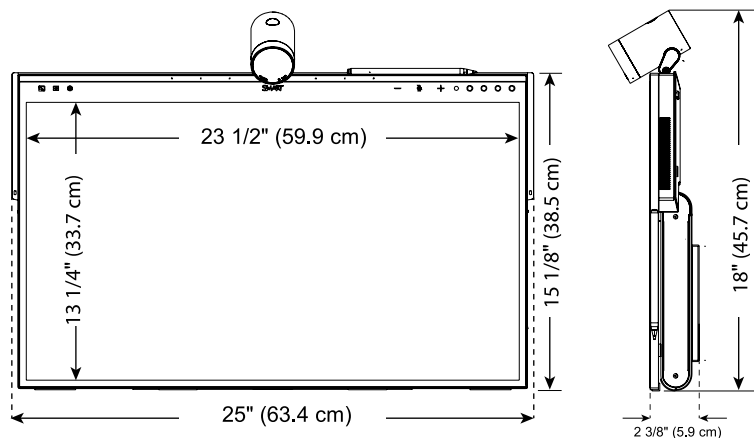

Weight

13 1/2 lb. (6.1 kg)

Shipping dimensions (not including pallet)

29 5/8" \times 19 3/16" \times 6 1/8"
(75.3 cm \times 48.8 cm \times 15.6 cm)

Shipping weight

23 5/16 lb. (10.5 kg)

VESA mount

M4 | 75 \times 75 mm

M4 | 100 \times 100 mm

smarttech.com
smarttech.com/contact

© 2025 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Models and specifications may vary by region. Please contact your local representative for details. Contents are subject to change without notice. June 18, 2025.