

SMART Chromebox OPS




CBM13-i3

| | |
|--------------------------------|--|
| Processor (Raptor Lake) | Intel Core i3 1315U |
| Memory | 8 GB DDR4 |
| Storage | 256 GB M.2 NVMe SSD |
| Graphics | Intel UHD Graphics |
| 4K UHD video | Yes, Full 4K UHD, 60 Hz |
| Operating system | Chrome OS License |
| Integrated audio | HD audio |
| LAN | Gigabit Ethernet |
| Wireless | Intel Wireless (2.4 GHz/5 GHz/6 GHz/BT) IEEE 802.11ax (Wi-Fi 6e) Bluetooth [®] 5.2 |

CBM13-i5

| | |
|--------------------------------|--|
| Processor (Raptor Lake) | Intel Core i5 1335U |
| Memory | 8 GB DDR4 |
| Storage | 256 GB M.2 NVMe SSD |
| Graphics | Intel UHD Graphics |
| 4K UHD video | Yes, Full 4K UHD, 60 Hz |
| Operating system | Chrome OS License |
| Integrated audio | HD audio |
| LAN | Gigabit Ethernet |
| Wireless | Intel Wireless (2.4 GHz/5 GHz/6 GHz/BT) IEEE 802.11ax (Wi-Fi 6e) Bluetooth [®] 5.2 |

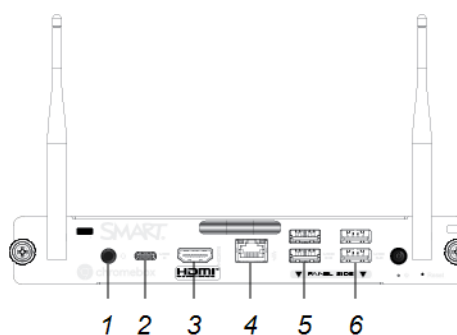

| No. | Inputs and outputs | Qty |
|-----|-----------------------------------|-----|
| 1 | Stereo 3.5 mm | 1 |
| 2 | USB Type-C | 1 |
| 3 | HDMI [®] 2.0 | 1 |
| 4 | RJ45 (including indicator lights) | 1 |
| 5 | USB 2.0 Type-A | 2 |
| 6 | USB 3.2 Gen1 Type-A | 2 |

| Included accessories | Qty |
|---------------------------------------|-----|
| Antennas | 2 |
| Illustrated installation instructions | 1 |

SMART Chromebox OPS

SMART displays and software¹

Supported SMART Board interactive displays

See > support.smarttech.com/docs/opscompatibility

**Note**

Install the OPS module in the accessory slot of supported SMART Board interactive displays.

Available SMART software

Lumio by SMART

Storage and operating requirements

| | |
|------------------------------|---|
| Power requirements | 12V to 19V DC |
| Operating temperature | 32–104°F (0–40°C) |
| Storage temperature | –4–140°F (–20–60°C) |
| Humidity | 10–90% relative humidity, non-condensing |

Power consumption

| | |
|----------------|---------|
| Typical | 90 W |
| Standby | < 0.5 W |

Certification and compliance²

| | |
|-----------------------------|--|
| Regulatory models | 0WI |
| US / Canada | UL Recognized FCC ISED CONEG Packaging California Prop 65 |
| EU / EEA / EFTA / UK | CE REACH RoHS Battery Packaging POP |

Purchasing information

| | |
|-------------------------------|-----------------------------|
| Order number: CBM13-i3 | Chromebox OPS, i3 Processor |
| Order number: CBM13-i5 | Chromebox OPS, i5 Processor |

SMART Warranty

Terms and conditions and warranty upgrade options vary by region. Visit smarttech.com/warranty or contact your reseller for information.

¹Sold separately

²Product availability may vary by region.

This product has received additional certifications not listed here.

SMART Chromebox OPS


Installation, dimensions, and weights

Notes

- All dimensions ± 0.3 cm. All weights ± 0.5 kg.
- Product ships upright.

CBM13-i3 / CBM13-i5

Dimensions

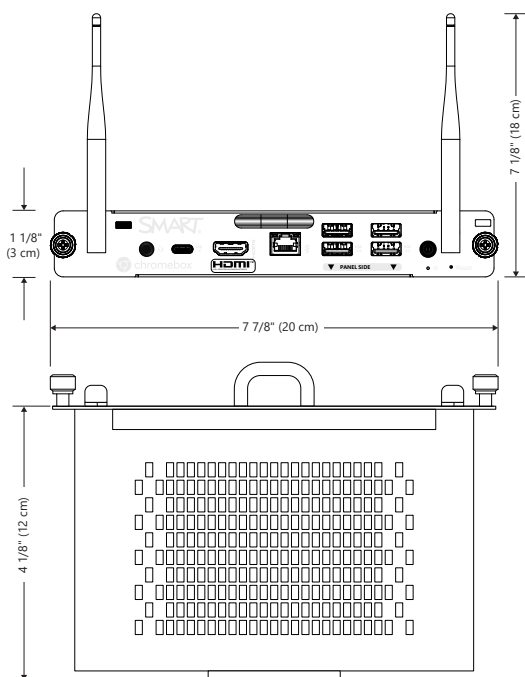

Weight

1.0 kg (2.23 lbs)

Product dimensions

$7 \frac{7}{8}" \times 5 \frac{3}{8}" \times 1 \frac{1}{8}"$ (20 cm \times 14 cm \times 3 cm)

Shipping dimensions

$9 \frac{41}{64}" \times 7 \frac{7}{8}" \times 2 \frac{9}{16}"$ (24.5 cm \times 20.5 cm \times 6.5 cm)

smarttech.com
smarttech.com/contact

© 2025 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Models and specifications may vary by region. Please contact your local representative for details. Contents are subject to change without notice. June 18, 2025.