



Education Software Installer 2013 June update

Windows® operating systems

System administrator's guide

This guide is available in [HTML](#).

Scan the following QR code to read the HTML version of this guide on your smart phone or other mobile device.



SMART®

Trademark notice

SMART Notebook, SMART Ink, SMART Response, Senteo, SMART Board, SMART Document Camera, SMART Vantage, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. Microsoft, Windows, Internet Explorer, ActiveX DirectX and Visual Studio are either registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Adobe, Flash and Reader are either registered trademarks or trademarks of Adobe Systems Incorporated in the U.S. and/or other countries. InstallShield, is a registered trademark or trademark of Flexera Software, Inc. and/or InstallShield Co. Inc. in the United States of America and/or other countries. All other third-party product and company names may be trademarks of their respective owners.

Copyright notice

© 2013 SMART Technologies ULC. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form by any means without the prior written consent of SMART Technologies ULC. Information in this manual is subject to change without notice and does not represent a commitment on the part of SMART.

This product and/or use thereof covered by one or more of the following U.S. patents.

www.smarttech.com/patents

05/2013

Contents

Chapter 1: Getting started	1
Computer requirements	2
Installation packages and supporting files	3
Chapter 2: Customizing installation packages	5
Using SMART Install Manager	5
Using third-party tools	15
Chapter 3: Deploying the software	17
Using the command line interface	18
Using third-party imaging or remote management software	20
Activating the software after installation	21
Renewing keys	25
Chapter 4: Updating the software	31
Using a Windows Installer update installation package (MSI file)	32
Using a Windows Installer patch (MSP file)	33
Chapter 5: Removing the software	35
Using the user interface	35
Using the command line interface	36
Appendix A: Windows Installer properties and parameters	43
Properties	43
Parameters	54
Examples	55
Appendix B: Language files and codes	57
Installation language files and codes	57
Language packs	58
Appendix C: Installing and maintaining Gallery content	61
Installing Gallery content	62
Modifying Gallery content	66
Changing Gallery content locations	71
Appendix D: Removing previous versions of SMART Board software	75
Removing SMART Board software 9.x	75
Removing SMART Board software 8.x	76
Removing SMART Board software 7.x	78

C O N T E N T S

Cleaning the registry79

Index81

Chapter 1

Getting started

Computer requirements	2
Installation packages and supporting files	3
Installation packages	3
Language files	4

This guide explains how to customize and deploy the following software:

- SMART Notebook™ collaborative learning software 11.2
- SMART Notebook Math Tools software
- 3D Tools for SMART Notebook software
- SMART Product Drivers 11.1
- SMART Ink™ 1.1 SP1
- SMART Response™ 2013 assessment software
- SMART Common Files



NOTE

For information on customizing and deploying previous versions of this software, see the appropriate system administrator's guides at smarttech.com/support.

This guide is intended for IT administrators and others experienced with customizing, deploying and administering Windows® software in a networked environment. To use this guide, you must

- Know IT terminology such as “registry” and “domain controller”
- Know how to complete basic administrative tasks in Windows operating systems such as modifying the registry
- Have administrative privileges and access to servers
- Have access to the Internet

IMPORTANT

You must run the commands documented in this guide in an *Administrator Command Prompt* window. To open an *Administrator Command Prompt* window, right-click the **Command Prompt** icon, and then select **Run as Administrator**.

Computer requirements

NOTE

Operating systems and other third-party software released after this SMART software might not be supported.

Before you install the software, ensure your teachers' computers meet the minimum requirements:

- Pentium® 4 processor or better
- 2 GB of RAM
- Free hard disk space:

Software	Space required
SMART Notebook software	832 MB
Gallery Essentials	575 MB
Lesson Activity Toolkit	136 MB
SMART Product Drivers	595 MB
SMART Ink	92 MB
SMART Response software	521 MB
SMART Common Files	295 MB
Recommended total free hard disk space	3 GB

- Windows XP SP3, Windows 7 SP1 or Windows 8 operating system
- Microsoft® .NET Framework 4 Client Profile for SMART Notebook software and SMART Ink
- Microsoft Visual Studio® 2010 Tools for Office for SMART Ink
- Adobe® Flash® Player 11.7 ActiveX® control for SMART Notebook software
- Adobe Flash Player 11.7 Firefox® plug-in for SMART Notebook software and SMART Response software

CHAPTER 1

Getting started

- Adobe Reader® 8.0 or later
- DirectX® technology 9 or later for SMART Notebook software and SMART Video Player
- DirectX 9 compatible graphics hardware for 3D Tools for SMART Notebook software
- Internet Explorer® Internet browser 8 or later



NOTE

If you're deploying SMART software to Windows XP computers, you must first install Windows Installer 4.5 on these computers. You can download Windows Installer 4.5 from support.microsoft.com/kb/942288.

Installation packages and supporting files

Before you can customize or deploy SMART software, you must locate the installation packages and supporting files.

Installation packages

Before deploying the Education Software Installer installation package, you must deploy the following third-party installation packages:

If you want to install this software:	Deploy these installation packages:
SMART Notebook software	<ul style="list-style-type: none">• Microsoft .NET Framework 4 Client Profile files (dotNetFx40_Client_x86_x64.exe)• Adobe Flash Player ActiveX control (install_flash_player_11_active_x.msi)• Adobe Flash Player plug-in (install_flash_player_11_plugin.msi)
SMART Product Drivers (including SMART Ink)	<ul style="list-style-type: none">• Microsoft .NET Framework 4 Client Profile files (dotNetFx40_Client_x86_x64.exe)• Microsoft Visual Studio Tools for Office (vstor40_x86.exe for 32-bit computers or vstor40_x64.exe for 64-bit computers running 32-bit or 64-bit versions of Microsoft Office)
SMART Response software	<ul style="list-style-type: none">• Adobe Flash Player plug-in (install_flash_player_11_plugin.msi)

NOTE

You can run the **dotNetFx40_Client_x86_x64.exe** file to install all required Microsoft .NET Framework prerequisites and the Microsoft .NET Framework 4 Client Profile files. However, SMART recommends that you download the latest version of the Microsoft .NET Framework files from the Microsoft website. For information on deploying the Microsoft .NET Framework, refer to the *.NET Framework deployment guide for administrators* on the MSDN website (msdn.microsoft.com/en-us/library/ee390831.aspx).

You can download the installation packages in a .zip file from smarttech.com/administratordownloads. The installation packages are located in the **Support** folder of the .zip file.

IMPORTANT

SMART recommends that you deploy SMART software using the **SMARTEducationSoftware.msi** installation package. However, if you choose to deploy the software using individual installation packages, you need to do the following:

- Deploy the **SMART Common Files.msi** file first.
- If you use a custom value for the **INSTALLDIR** property, ensure this value is identical across all the installation packages.

Save the installation packages in a location on your network that's accessible to all computers on which you plan to install the software.

Language files

If you plan to deploy the installation packages in a language other than English (U.S.), ensure the corresponding MST file for the language is in the same folder as the MSI file (see *Installation language files and codes* on page 57).

Similarly, if you want users to be able to view and use the software in a language other than English, you must download and install the appropriate language pack (see *Language packs* on page 58).

These language packs are located in the downloaded .zip file under **Support\Languages**.

Chapter 2

Customizing installation packages

Using SMART Install Manager	5
Installing SMART Install Manager	5
Using SMART Install Manager	6
Opening an installation package	6
Saving your changes	7
Publishing your changes as an MST file	7
Customizing the installation package	7
Using third-party tools	15

You can customize installation packages using SMART Install Manager.

OR

You can customize installation packages using third-party tools and Windows Installer properties.

Using SMART Install Manager

SMART Install Manager enables you to customize SMART software installation packages (also known as MSI files) by publishing MST files. You can then deploy the MSI and MST files to computers using third-party imaging or remote management software.

Installing SMART Install Manager

Download and install SMART Install Manager from the SMART Support website.

To install SMART Install Manager from the website

1. Go to smarttech.com/administratordownloads.
2. Scroll to *SMART Notebook collaborative learning software*, click **Choose a version**, and then select **SMART Notebook software > 11.2 for Windows**.
3. Click **Download SMART Install Manager**, and then click **Download**.

CHAPTER 2

Customizing installation packages

4. Save the **Install Manager.exe** file to your computer.
5. Double-click the **Install Manager.exe** file.

The SMART Install Manager installation wizard appears.

6. Follow the on-screen instructions.

Using SMART Install Manager


After you install SMART Install Manager, shortcuts to the software appear on the desktop and in the Start menu (Windows XP and Windows 7 operating systems) or the *Apps* screen (Windows 8 operating system).

With SMART Install Manager, you can do the following:

- Open and customize an installation package.
- Save your changes to the installation package as an XML file.
- Publish your changes to the installation packages as an MST file.

Opening an installation package

To customize an installation package, drag its MSI file into the SMART Install Manager window.

Alternatively, you can search for installation packages on your computer by clicking .


NOTE

All installation packages you've previously opened in SMART Install Manager appear in the *Unmodified Packages* tab.

CHAPTER 2

Customizing installation packages

After you open an installation package, a set of pages for that installation package appears in SMART Install Manager. Customize the installation package using the controls on these pages.

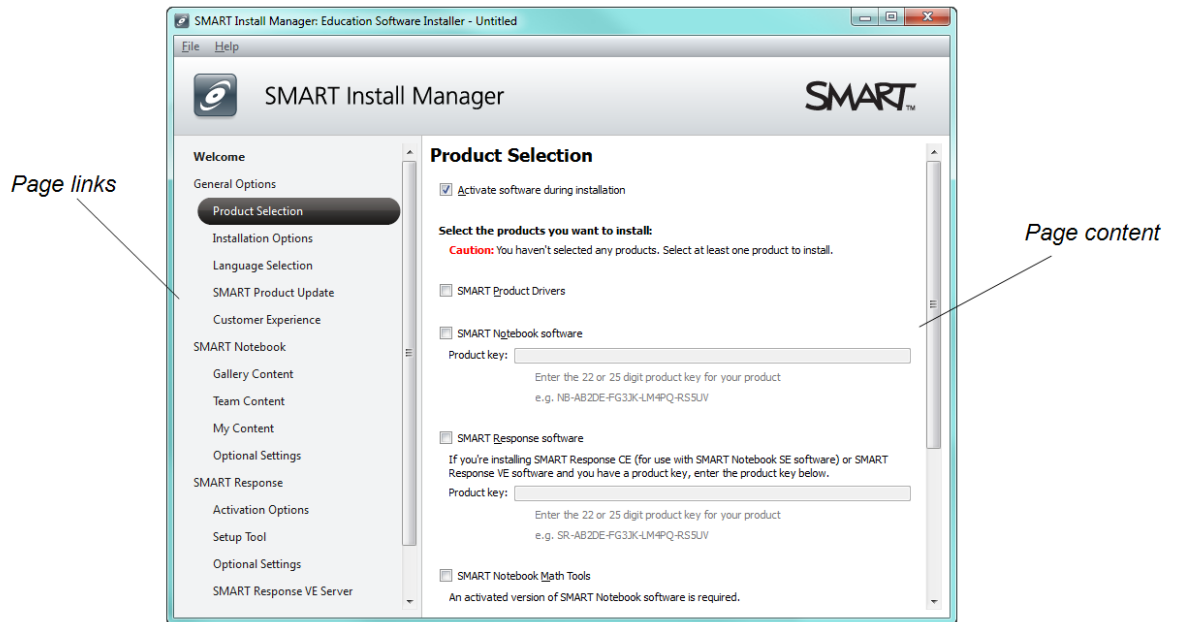

Saving your changes

After you customize an installation package, save your changes as an XML file by selecting **File > Save As**. When you next start SMART Install Manager, load the XML file by selecting **File > Open**, or by opening the MSI file and then selecting **File > Import**.

Publishing your changes as an MST file

The final step in using SMART Install Manager to customize an installation package is to publish your changes as an MST file. To do this, select **File > Publish**, and then use the dialog box to define a location for and create the MST file.

TIP

If you use an older MST file created with an earlier version of the MSI file, it might not work properly. Use the current MSI file to create your MST file. Publish the MST file in the same location as the MSI file.

Customizing the installation package

To customize the installation package, open the **SMARTEducationSoftware.msi** file in SMART Install Manager (see *Opening an installation package* on the previous page), and then set the controls on each page.

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
General Options: Product Selection		
Activate software during installation	Select to activate the software automatically during installation rather than manually after installation.	You must include the product key properties for the software you're installing for this property to work. For mass activation information, see <i>Activating the software after installation</i> on page 21.
SMART Product Drivers	Select to install SMART Product Drivers.	Installing SMART Product Drivers also installs SMART Ink.
SMART Notebook software	Select to install SMART Notebook software.	
Product key	Type your 22- or 25-character product key for SMART Notebook software.	As of version 11.1, you don't need to activate SMART Notebook software. SMART provides you with the right to use this software when you purchase a SMART interactive product. If you want to use SMART Notebook software with a device that isn't a SMART interactive product, you must purchase a product key. You can type the product key with or without hyphens. When you type a volume product key, the software activates when you deploy it to your network computers.
SMART Response software	Select to install SMART Response software.	If you choose to install SMART Response software, you must also install SMART Notebook software. When you select this check box, SMART Install Manager automatically selects SMART Notebook .

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
Product key	If you're installing SMART Response software and students use SMART Notebook SE (Student Edition) software or SMART Response VE Internet-enabled devices to answer questions, type your 22- or 25-character product key for SMART Response software.	You can type the product key with or without hyphens. When you type a volume product key, the software activates when you deploy it to your network computers.
SMART Notebook Math Tools	Select to install SMART Notebook Math Tools software.	If you choose to install SMART Notebook Math Tools software, you must also install SMART Notebook software.
Product key	Type your 22- or 25-character product key for SMART Notebook Math Tools software.	You can type the product key with or without hyphens. When you type a volume product key, the software activates when you deploy it to your network computers.
SMART Notebook 3D Tools	Select to install 3D Tools for SMART Notebook software.	If you choose to install 3D Tools for SMART Notebook software, you must also install SMART Notebook software.
Product key	Type your 22- or 25-character product key for 3D Tools for SMART Notebook software.	You can type the product key with or without hyphens. When you type a volume product key, the software activates when you deploy it to your network computers.

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
General Options: Installation Options		
Installation directory	Type the path to your preferred folder for the software.	If you specify a folder, include a back slash (\) at the end of the path. If you don't specify a folder, Windows Installer installs the software in [Program files] \SMART Technologies\ Education Software where [Program files] is C:\Program Files for 32-bit versions of Windows operating systems or C:\Program Files (x86) for 64-bit versions of Windows operating systems. Ensure the folder path is valid. SMART Install Manager doesn't verify the folder path.
Install Start menu and desktop shortcuts	Select to create shortcuts in the Start menu and on the desktop.	
General Options: Language Selection		
Select the language packs you want to install	Select the language packs you want to install.	Don't select more than 20 language packs (see smarttech.com/kb/170081). Some SMART software doesn't support all listed languages.
General Options: SMART Product Update		
Install SMART Product Update in Full mode	Select to install SMART Product Update (SPU) in Full mode.	In Full mode, users can view the installed versions of SMART software as well as their product keys, and download and install updates.
Install SMART Product Update in Dashboard mode	Select to install SPU in Dashboard mode.	In Dashboard mode, users can view only the installed versions of SMART software and their product keys.
Do not install SMART Product Update	Select to not install SPU.	

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
Check for updates	Type the number of days (1 to 60) between SPU checks.	This option is available only if you install SPU in Full mode. By default, SPU checks for product updates every 30 days.
Notify users about SMART product updates	Select to notify users of available SMART product updates through the Windows notification area.	This option is available only if you install SPU in Full mode.
General Options: Customer Experience		
Enable the Customer Experience Program on all devices	Select to automatically enable the Customer Experience Program for all users.	
Disable the Customer Experience Program on all devices	Select to automatically disable the Customer Experience Program for all users.	
SMART Notebook: Gallery Content		
See <i>Installing and maintaining Gallery content</i> on page 61.		
SMART Notebook: Team Content		
Team Content path	Type the path to the Team Content folder, which is a location on your school's network where users can store shared content.	For information on creating a Team Content folder, see <i>Creating or connecting to Team Content folders</i> on page 72.
SMART Notebook: My Content		
My Content path	Type the path to the My Content folder, which is a location on the user's computer where he or she can store individual content.	You can include environment variables in the path.
SMART Notebook: Optional Settings		
Install print capture driver	Select to include the Print Capture Driver in the installation.	The Print Capture Driver is a printer driver that enables users to export content from other programs to SMART Notebook software by using the SMART Notebook Document Writer.






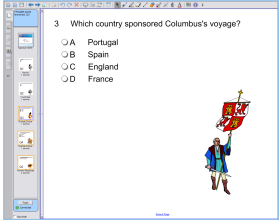
CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
Register SMART Document Camera drivers	Select to enable the registration of SMART Document Camera™ drivers.	Disable the registration of SMART Document Camera drivers if they conflict with the third-party drivers on the computer. If you choose to install 3D Tools for SMART Notebook software, SMART Install Manager selects this check box automatically. You're unable to clear it.
Enable hardware acceleration	Select to enable hardware acceleration.	Through hardware acceleration, SMART Notebook software completes some tasks using your computer's graphics processing unit (GPU) rather than its central processing unit (CPU). Hardware acceleration improves the performance of SMART Notebook software on most computers. However, hardware acceleration can cause issues on some computers, such as content not displaying correctly and SMART Notebook software not responding. If users are encountering these issues, you can disable hardware acceleration.
Copy the SMART Notebook tutorial file	Select to copy the SMART Notebook software tutorial file to the user's <i>Documents</i> folder.	The SMART Notebook software tutorial file opens when a user first starts the software. It demonstrates how to use the software and what's new in the current version of the software. If there is limited space on users' computers, you can choose to not copy the tutorial file to their <i>Documents</i> folders.

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
SMART Response: Setup Tool		
SMART Response LE	Select to enable students to answer questions with SMART Response LE clickers.	
SMART Response PE	Select to enable students to answer questions with SMART Response PE clickers.	
SMART Response XE	Select to enable students to answer questions with SMART Response XE clickers.	
SMART Response/Senteo	Select to enable students to answer questions with SMART Response or Senteo™ clickers.	
SMART Response VE	Select to enable students to answer questions with SMART Response VE Internet-enabled devices.	
SMART Notebook SE	Select to enable students to answer questions with SMART Notebook SE software in SMART Response CE mode.	

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
Multiple SMART Response devices in the same class	Select to enable students to answer questions with Senteo, SMART Response, SMART Response LE, SMART Response PE or SMART Response XE clickers, or SMART Notebook SE software. Select Include SMART Response VE to also enable students to answer questions with SMART Response VE Internet-enabled devices.	
SMART Response: Optional Settings		
Start Desktop Menu at log in for all users	Select to start SMART Response software when the user logs on.	
Install the education standards database	Select to install the SMART Response education standards database.	
File port	Type the port number for the file data channel. OR Type * to use a random port number for the file data channel.	This control is applicable only if students answer questions with SMART Notebook SE software. The default port is 23458.
Secure Base port	Type the port number for the encrypted data channel. OR Type * to use a random port number for the encrypted data channel.	This control is applicable only if students answer questions with SMART Notebook SE software. The default port is 23457.
Certificate file	Type the path to the certificate file for SSL digital certificate encryption. OR Click Browse and then browse to and select the certificate file.	This control is applicable only if students answer questions with SMART Notebook SE software.
SMART Response: SMART Response VE Server		
Local server website	Type the URL of the SMART Response VE Server (for example, http://response.example.com).	

CHAPTER 2

Customizing installation packages

Control	Procedure	Notes
SMART Product Drivers: Optional Settings		
Enable Tablet PC Support	Select to use Tablet PC functionality with your SMART interactive display without having to connect a Tablet PC.	This property is applicable for the Windows 7 operating systems. It has no effect on other operating systems.
Start SMART Board Tools at logon	Select to start SMART Board Tools when the user logs on.	
Start SMART Ink at logon	Select to start SMART Ink when the user logs on.	
Make SMART Ink Viewer the default PDF viewer	Select to make SMART Ink Viewer to the default PDF viewer.	
Start SMART Vantage services at logon	Select to enable SMART Vantage™ and SNMP Agent services.	Enable these services if your school or district is using SMART Vantage software.

Using third-party tools

You can customize SMART software installation packages by creating MST files using a third-party tool, such as Orca database editor, and the Windows Installer properties (see *Windows Installer properties and parameters* on page 43).

Chapter 3

Deploying the software

Using the command line interface	18
Installing prerequisite third-party software	18
Installing SMART software	19
Using third-party imaging or remote management software	20
Activating the software after installation	21
Renewing keys	25
Renewing keys in unattended mode	26
Renewing keys in user interface mode	27
Enabling and disabling automatic renewal of keys	28

You can deploy installation packages using the command line interface.

OR

You can deploy installation packages using third-party imaging or remote management software.

IMPORTANT

- Close any Firefox browser windows before installing the Adobe Flash Player plug-in.
- Regardless of how you deploy the software, you must choose to install at least one of the software products. Otherwise, the **SMARTEducationSoftware.msi** file does not install any of the software products.
- If you are deploying SMART Product Drivers, the user must restart (Windows XP operating systems) or log off and log back on (Windows 7 and Windows 8 operating systems) after you deploy the software to start the SMART Board Service. In addition, an error message might appear after you deploy the software stating that the **SMARTBoardService.exe** file could not be found. The user can close this error message.
- If you want to install language packs, you must do so when you first deploy the software. If you want to install a language pack after you first deploy the software, you must do so using the language pack's individual MSI file.

 **NOTE**

You might need to manually activate the software after you deploy it.

Using the command line interface

Using the command line interface, you can deploy installation packages in many ways, including running commands from the Command Prompt window and including commands in batch script files.

Installing prerequisite third-party software

■ To install the Microsoft .NET Framework 4 Client Profile files

 **NOTE**

SMART recommends that you follow the instructions on deploying the Microsoft .NET Framework in the *.NET Framework deployment guide for administrators* on the MSDN website (msdn.microsoft.com/en-us/library/ee390831.aspx).

Run the following command to install the files in UI mode:

```
[Path]\dotNetFx40_Client_x86_x64.exe /passive /showfinalerror
```

OR

Run the following command to install the files in silent mode:

```
[Path]\dotNetFx40_Client_x86_x64.exe /q
```

Where *[Path]* is the path to the **dotNetFx40_Client_x86_x64.exe** file.

■ To install Microsoft Visual Studio Tools for Office for 32-bit computers

Run the following command:

```
[Path]\vstor40_x86.exe /q
```

Where *[Path]* is the path to the **vstor40_x86.exe** file.

CHAPTER 3

Deploying the software

To install Microsoft Visual Studio Tools for Office for 64-bit computers

Run the following command:

```
[Path]\vstor40_x64.exe /q
```

Where *[Path]* is the path to the **vstor40_x64.exe** file.

To install the Adobe Flash Player ActiveX control

Run the following command:

```
msiexec /i "[Path]\install_flash_player_11_active_x.msi"  
[Parameter]
```

Where

- *[Path]* is the path to the **install_flash_player_11_active_x.msi** file.
- *[Parameter]* is the installation parameter (see *Parameters* on page 54).

To install the Adobe Flash Player plug-in

Run the following command:

```
msiexec /i "[Path]\install_flash_player_11_plugin.msi" [Parameter]
```

Where

- *[Path]* is the path to the **install_flash_player_11_plugin.msi** file.
- *[Parameter]* is the installation parameter (see *Parameters* on page 54).

Installing SMART software

To install SMART software

Run the following command if you created an MST file to customize the installation package:

```
msiexec /i "[Path]\SMARTEducationSoftware.msi" TRANSFORMS="  
[MST file]" [Parameter]
```

OR

CHAPTER 3

Deploying the software

Run the following command if you didn't create an MST file to customize the installation package:

```
msiexec /i "[Path]\SMARTEducationSoftware.msi" [Properties]
[Parameter]
```

Where

- *[Path]* is the path to the **SMARTEducationSoftware.msi** file and MST file.
- *[MST file]* is the name of the MST file.
- *[Properties]* is a set of properties you can include to customize the installation (see *Properties* on page 43).
- *[Parameter]* is the installation parameter (see *Parameters* on page 54).

Using third-party imaging or remote management software

The following procedure shows how to deploy SMART software using Group Policy-based deployment software. For information on deploying SMART software using your organization's third-party imaging or remote management software, see the software's documentation.



NOTES

- This procedure may vary depending on your version of Windows operating system and your system preferences.
- Ensure your domain controller has Windows Installer 4.5.

To deploy an installation package

1. Copy the MSI file and the MST file to `\\[Domain Controller]\NETLOGON`, where *[Domain Controller]* is your domain controller.
2. Open Control Panel, double-click **Administrative Tools**, and then double-click **Active Directory Users and Computers**.

The *Active Directory Users and Computers* window appears.

3. Right-click your domain, and then select **Properties**.

The *Properties* dialog box appears.

CHAPTER 3

Deploying the software

4. Click the **Group Policy** tab, and then click **Edit**.
The *Group Policy Object Editor* dialog box appears.
5. Browse to **Computer Configuration\Software Settings**.
6. Right-click **Software Installation**, select **New > Package**, and then browse to and select the MSI file from step 1.
7. In the *Deploy Software* section, click **Advanced**, and then click **OK**.
8. Click the **Modifications** tab, click **Add**, and then browse to and select the MST file from step 1.
9. Click **OK** to apply the MST file to the MSI file.
10. Close all open windows and dialog boxes.

The next time each computer on the domain starts, the computer automatically installs the software in Silent mode with the customizations defined in the MST file.

Activating the software after installation

There are two situations in which the software doesn't activate completely:

- **Imaging a computer:** Activation is linked to the hardware identifier of the computer the software is installed and activated on. If you clone a hard drive image with installed and activated software, you must activate the software on each cloned computer.
- **Reverting a computer to an earlier state:** If you use system recovery or protection software that periodically restores the computer to an earlier state, you might need to activate the software before locking the computer so that the activation record is not cleared each time the computer is restored.

Run the activation wizard while connected to the network or complete the following procedure to activate the software on each computer.



NOTE

You don't need to activate SMART Notebook software or SMART Product Drivers. SMART provides this software to you when you purchase a SMART interactive product.

To activate SMART software after installation

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe"  
--puid education_bundle --m=[Value] --v=3 --a [Optional flags]
```

CHAPTER 3

Deploying the software

```
[Product keys]
```

Where

- *[Value]* is 4 to run the activation wizard in unattended mode.

OR

[Value] is 6 to run the activation wizard in user interface mode.

- *[Optional flags]* are optional flags you can include to configure the activation wizard.

Flag	Purpose
--monitor=[Number]	Specify the monitor to display the activation wizard.
--proxy=[Host:Port]	Specify the proxy host and port number to use for activation.
--proxyuser=[User]	Specify the proxy user name to use for activation.
--proxypassword=[Password]	Specify the proxy password to use for activation.
--locale=[Code]	Display the activation wizard user interface in a specific language, where <i>[Code]</i> is your language code (see <i>Installation language files and codes</i> on page 57).

- *[Product keys]* are one or more software product keys you want to activate. Each product key must be in the following form:

```
--pk [Product key]
```

Where *[Product key]* is the software product key.

To activate only SMART Notebook Math Tools software after installation

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe"  
--puid education_bundle --m=[Value] --v=3 --a [Optional flags]  
--pk [Product key]
```

Where

- *[Value]* is 4 to run the activation wizard in unattended mode.

OR

[Value] is 6 to run the activation wizard in user interface mode.

- *[Optional flags]* are optional flags you can include to configure the activation wizard.

Flag	Purpose
--monitor=[Number]	Specify the monitor to display the activation wizard.
--proxy=[Host:Port]	Specify the proxy host and port number to use for activation.
--proxyuser=[User]	Specify the proxy user name to use for activation.
--proxypassword=[Password]	Specify the proxy password to use for activation.
--locale=[Code]	Display the activation wizard user interface in a specific language, where <i>[Code]</i> is your language code (see <i>Installation language files and codes</i> on page 57).

- *[Product key]* is the software product key.

■ To activate only 3D Tools for SMART Notebook software after installation

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\
SMART Product Update\activationwizard.exe"
--puid education_bundle --m=[Value] --v=3 --a [Optional flags]
--pk [Product key]
```

Where

- *[Value]* is 4 to run the activation wizard in unattended mode.

OR

[Value] is 6 to run the activation wizard in user interface mode.

- *[Optional flags]* are optional flags you can include to configure the activation wizard.

Flag	Purpose
--monitor=[<i>Number</i>]	Specify the monitor to display the activation wizard.
--proxy=[<i>Host:Port</i>]	Specify the proxy host and port number to use for activation.
--proxyuser=[<i>User</i>]	Specify the proxy user name to use for activation.
--proxypassword=[<i>Password</i>]	Specify the proxy password to use for activation.
--locale=[<i>Code</i>]	Display the activation wizard user interface in a specific language, where <i>[Code]</i> is your language code (see <i>Installation language files and codes</i> on page 57).

- *[Product key]* is the software product key.

■ To activate only SMART Response software after installation

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\
SMART Product Update\activationwizard.exe" --puid response_3a
--uipack response_3 --m=[Value] --v=3 --a [Optional flags]
--pk [Product key]
```

Where

- *[Value]* is 4 to run the activation wizard in unattended mode.

OR

[Value] is 6 to run the activation wizard in user interface mode.

- *[Optional flags]* are optional flags you can include to configure the activation wizard.

Flag	Purpose
--monitor=[Number]	Specify the monitor to display the activation wizard.
--proxy=[Host:Port]	Specify the proxy host and port number to use for activation.
--proxyuser=[User]	Specify the proxy user name to use for activation.
--proxypassword=[Password]	Specify the proxy password to use for activation.
--locale=[Code]	Display the activation wizard user interface in a specific language, where <i>[Code]</i> is your language code (see <i>Installation language files and codes</i> on page 57).

- *[Product key]* is the software product key.

**NOTE**

This command is applicable only if you're running SMART Response software in CE mode (students answer questions with SMART Notebook SE software) or VE mode (students answer questions with Internet-enabled devices). Instructions for activating all other modes are included in the SMART Response documentation.

Renewing keys

If your school has purchased maintenance or subscription licenses, SMART software attempts to renew the keys automatically on a scheduled basis before and after the keys' expiry dates. However, you can choose to explicitly renew the keys at a specified time. You can also choose to disable automatic renewal in situations where you don't want the keys on a computer to be renewed (because, for example, you're planning to retire the computer).

**TIP**

The activation wizard user interface distinguishes between maintenance and subscription licenses:

- Maintenance licenses are labeled with "Valid for versions released before *[Date]*".
- Subscription licenses are labeled with the expiration date of the key.

Renewing keys in unattended mode

To renew all keys

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe" --m=15 --v=3  
--renewal-mode all
```

To renew all keys associated with a single product

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe" --m=15 --v=3  
--renewal-mode product --puid=[Product]
```

Where *[Product]* is **response_3a** or **education_bundle**.



NOTE

This command renews all keys associated with the specified product.

To renew specific keys

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe" --m=15 --v=3  
--renewal-mode product --puid=[Product] [Product keys]
```

Where

- *[Product]* is **response_3a** or **education_bundle**.
- *[Product keys]* are one or more software product keys you want to renew. Each product key must be in the following form:

```
--pk=[Product key]
```

Where *[Product key]* is the software product key.

Renewing keys in user interface mode

To renew all keys associated with a single product

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\
SMART Product Update\activationwizard.exe" --m=16 --v=3
--renewal-mode product --puid=[Product] --uipack=[UI pack]
```

Where

- *[Product]* is **response_3a** or **education_bundle**.
- *[UI pack]* is the corresponding UI pack for the selected product (**response_3** or **education_bundle**).



NOTE

This command renews all keys associated with the specified product.

To renew specific keys

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\
SMART Product Update\activationwizard.exe" --m=16 --v=3
--renewal-mode product --puid=[Product] --uipack=[UI pack]
[Product keys]
```

Where

- *[Product]* is **response_3a** or **education_bundle**.
- *[UI pack]* is the corresponding UI pack for the selected product (**response_3** or **education_bundle**).
- *[Product keys]* are one or more software product keys you want to renew. Each product key must be in the following form:

```
--pk=[Product key]
```

Where *[Product key]* is the software product key.

Enabling and disabling automatic renewal of keys

To enable automatic renewal of specific keys

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe" --m=17  
--puid=[Product] --v=3 --auto-renew [Product keys]
```

Where

- *[Product]* is **response_3a** or **education_bundle**.
- *[Product keys]* are one or more software product keys you want to renew automatically. Each product key must be in the following form:

```
--pk=[Product key]
```

Where *[Product key]* is the software product key.

To disable automatic renewal of specific keys

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe" --m=17  
--puid=[Product] --v=3 --no-auto-renew [Product keys]
```

Where

- *[Product]* is **response_3a** or **education_bundle**.
- *[Product keys]* are one or more software product keys you don't want to renew automatically. Each product key must be in the following form:

```
--pk=[Product key]
```

Where *[Product key]* is the software product key.

To disable automatic renewal on a computer

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe" --m=18 --v=3  
--no-auto-renew
```


CHAPTER 3

Deploying the software

To enable automatic renewal on a computer

Run the following command:

```
"C:\Program Files\Common Files\SMART Technologies\  
SMART Product Update\activationwizard.exe" --m=18 --v=3  
--auto-renew
```


Chapter 4

Updating the software

SMART periodically releases updates to its software. These updates add new features and resolve issues.

Go to smarttech.com/software to download the latest installation package. SMART provides updates in two file formats in the installation package:

Go to smarttech.com/software to download the latest installation package. SMART provides updates in MSI file format in the installation package:

- Windows Installer update installation packages (MSI files)
- Windows Installer patches (MSP files)



NOTE

MSP files are available only for select updates as identified on the SMART website.

Which file format you use depends on the version of the software installed on your computers and the version of the update. If these versions are the same, you can use the MSP file, if available, to install the update. If these versions are different (because, for example, a previous version of the software is installed on your computers), you must first upgrade the software on your computers to the same version as the update using the MSI file and then install the update using the MSP file, if available.

After you download an installation package and extract the update files, place the update files in a location on your network that's accessible to all the computers you plan to update.



IMPORTANT

You cannot roll back an update after installing it on your computers. You must remove the full version of the software using Control Panel or the command line interface (see *Removing the software* on page 35), and then install the previous version of the software.

Using a Windows Installer update installation package (MSI file)

The command line for running an update using a Windows Installer update installation package varies depending on whether the update is major or minor.



NOTE

The SMART website indicates whether an update is major or minor.

To run a major software update using a Windows Installer update installation package

Run the following command:

```
msiexec /i "[Path]\[File].msi" [Parameter]
```

Where

- *[Path]* is the path to the MSI file.
- *[File]* is the name of the MSI file.
- *[Parameter]* is the installation parameter (see *Parameters* on page 54).



IMPORTANT

Do not include the REINSTALLMODE and REINSTALL properties.

To run a minor software update using a Windows Installer update installation package

Run the following command:

```
msiexec /i "[Path]\[File].msi" REINSTALLMODE=vomus REINSTALL=ALL  
[Parameter]
```

Where

- *[Path]* is the path to the MSI file.
- *[File]* is the name of the MSI file.
- *[Parameter]* is the installation parameter (see *Parameters* on page 54).



IMPORTANT

You must include the REINSTALLMODE=vomus and REINSTALL=ALL properties for a minor update to succeed.

Using a Windows Installer patch (MSP file)

■ To run a software update using a Windows Installer patch

Run one of the following commands:

```
msiexec /p "[Path]\[File].msp" REINSTALLMODE=omus /q
```

```
msiexec /update "[Path]\[File].msp" /quiet
```

Where

- *[Path]* is the path to the MSP file.
- *[File]* is the name of the MSP file.

Chapter 5

Removing the software

Using the user interface	35
Using the command line interface	36
Recommended procedures	36
Other commands	39
Product codes	40
SMART Notebook software	40
SMART Response software	40
SMART Product Drivers	41
SMART Ink	41
SMART Common Files	42

SMART Uninstaller enables you to remove SMART software.

Using the user interface

You can remove SMART software from individual computers using the SMART Uninstaller user interface.

To remove SMART software

1. In Windows XP and Windows 7 operating systems, select **Start > All Programs > SMART Technologies > SMART Tools > SMART Uninstaller**.

OR

In Windows 8 operating system, go to the *Apps* screen and then scroll to and press **SMART Uninstaller**.

2. Press **Next**.

CHAPTER 5

Removing the software

3. Select the check boxes of the SMART software and supporting packages that you want to remove, and then press **Next**.

NOTES

- Some SMART software is dependent on other SMART software. For example, if you select the **SMART Notebook** check box, SMART Uninstaller selects the **SMART Response** check box automatically because SMART Response software is dependent on SMART Notebook software.
- SMART Uninstaller automatically removes any supporting packages that are no longer being used. If you choose to remove all SMART software, SMART Uninstaller automatically removes all supporting packages, including itself.

TIPS

- To select all software and supporting packages, press **Select All**.
- To clear the selection of all software and supporting packages, press **Clear All**.

4. Press **Uninstall**.

SMART Uninstaller removes the selected software and supporting packages.

5. Press **Finish**.

Using the command line interface

In addition to removing SMART software using the SMART Uninstaller user interface, you can remove SMART software using the SMART Uninstaller command line interface. This enables you to automate the removal of SMART software and remove SMART software remotely.

Recommended procedures

The following are recommended procedures for removing SMART software using the SMART Uninstaller command line interface.

NOTE

SMART recommends that you copy SMART Uninstaller to a temporary location before running command lines and prefix command lines with **start /wait**.

CHAPTER 5

Removing the software

To remove all SMART software

1. Copy SMART Uninstaller to a temporary location by running one of the following commands:

- For 32-bit operating systems:

```
copy "%CommonProgramFiles%\SMART Technologies\  
SMART Uninstaller.exe" "%TEMP%"
```

- For 64-bit operating systems:

```
copy "%CommonProgramFiles(x86)%\SMART Technologies\  
SMART Uninstaller.exe" "%TEMP%"
```

2. Remove all software by running the following command:

```
start /wait "SMART Uninstaller" "%TEMP%\SMART Uninstaller.exe"  
--noui --uninstall-all --uilevel none
```

3. Delete the copy of SMART Uninstaller in the temporary location by running the following command:

```
del "%TEMP%\SMART Uninstaller.exe"
```

To remove select SMART software by product name

1. Copy SMART Uninstaller to a temporary location by running one of the following commands:

- For 32-bit operating systems:

```
copy "%CommonProgramFiles%\SMART Technologies\  
SMART Uninstaller.exe" "%TEMP%"
```

- For 64-bit operating systems:

```
copy "%CommonProgramFiles(x86)%\SMART Technologies\  
SMART Uninstaller.exe" "%TEMP%"
```

CHAPTER 5

Removing the software

2. Remove select software by running the following command:

```
start /wait "SMART Uninstaller" "%TEMP%\SMART Uninstaller.exe"  
--noui --uninstall "[Product names]" --uilevel none
```

Where *[Product names]* is a comma delimited list of product names (for example, **SMART Notebook, SMART Response**).

4. Delete the copy of SMART Uninstaller in the temporary location by running the following command:

```
del "%TEMP%\SMART Uninstaller.exe"
```

To remove select SMART software by product code

1. Copy SMART Uninstaller to a temporary location by running one of the following commands:

- For 32-bit operating systems:

```
copy "%CommonProgramFiles%\SMART Technologies\  
SMART Uninstaller.exe" "%TEMP%"
```

- For 64-bit operating systems:

```
copy "%CommonProgramFiles(x86)%\SMART Technologies\  
SMART Uninstaller.exe" "%TEMP%"
```

2. Remove select software by running the following command:

```
start /wait "SMART Uninstaller" "%TEMP%\SMART Uninstaller.exe"  
--noui --uninstall-pc [Product codes] --uilevel none
```

Where *[Product codes]* is a comma delimited list of product codes (see *Product codes* on page 40).

4. Delete the copy of SMART Uninstaller in the temporary location by running the following command:

```
del "%TEMP%\SMART Uninstaller.exe"
```

CHAPTER 5

Removing the software

Other commands

In addition to the commands in the recommended procedures, you can include the following commands with SMART Uninstaller.

Command	Description	Notes (if any)
<code>--dry-run</code>	Runs the command line but doesn't remove the software.	This is useful for testing command lines before implementing them.
<code>--locale [Language code]</code> Where <i>[Language code]</i> is a language code (for example, fr for French)	Displays SMART Uninstaller in a language other than the operating system's language.	The appropriate language pack must be installed to display SMART Uninstaller in the language.
<code>--uilevel [Level]</code> Where <i>[Level]</i> is none, basic (default), reduced or full	Specifies the user interface that displays when SMART Uninstaller removes the software.	Normally, --uilevel none is used only in combination with --noui .
<code>--no-auto-remove</code>	Disables the automatic removal of supporting packages (for example, SMART Common Files) that are no longer required after the selected packages are removed.	This is used only if --noui is also included.
<code>--noui</code>	Doesn't display the SMART Uninstaller user interface.	Normally, --noui is used only in combination with --uilevel none .
<code>--uninstall-all</code>	Removes all detected SMART packages.	
<code>--uninstall [Product names]</code> Where <i>[Product names]</i> is a comma delimited list of product names (for example, SMART Notebook,SMART Response)	Removes the specified products.	
<code>--uninstall-pc [Product codes]</code> Where <i>[Product codes]</i> is a comma delimited list of product codes (see <i>Product codes</i> on the next page)	Removes the specified products.	

CHAPTER 5

Removing the software

Product codes

SMART Notebook software

Version	Product code
10.0.124.0	{3E926B45-3748-40F9-8A30-99B225E1D2E5}
10.0.126.0	{F581DF68-CAE9-4064-A6CD-705D95D1C756}
10.0.132.0	{F581DF68-CAE9-4064-A6CD-705D95D1C756}
10.0.187.1	{F581DF68-CAE9-4064-A6CD-705D95D1C756}
10.1.253.1	{D836B93F-3030-4047-99D3-65304A25839A}
10.0.517.2	{A51CDA36-B81D-4934-9C9D-B649A0DBF4CD}
10.0.596.3	{5C98A4FE-1F42-4F02-B738-F32886AE5467}
10.0.631.3	{5C98A4FE-1F42-4F02-B738-F32886AE5467}
10.6.94.0	{0A0719F0-AD56-42BA-B68C-EFFC330B6F13}
10.6.140.1	{47E6A509-37B7-4440-A252-7031E9A898D7}
10.7	{9550F8A6-3D21-4544-8B87-F9FE7E01B964}
10.8	{ED0FF410-41B9-441F-B457-4AC81782E8BF}
11.0	{AFE024C7-7CA7-4C8E-90EE-D877C7CD96A3}
11.1	{A810B5F5-8ACA-4670-B6B3-F98B07DFF6C4}
11.2	{82E3F365-86BD-4EA8-80CA-F498EBE89537}

SMART Response software

Version	Product code
2.0.97.0	{BDB1F637-C890-4B86-A5A7-D20D8DBE176B}
2.1.307.0	{CFD7DD74-42F9-4B50-AFCD-1E0B0F5ABBA4}
2.2.591.1	{7A63D2B1-DE99-4DB3-93E7-8FDEDD49E3E3}
2.5.39.0	{D04D1BAC-D63F-498F-B613-FB7BCF2F6C52}
3.0.159.0	{6FFCF813-06AF-468A-AD64-7F9B04DD0EDA}
3.0.256.1	{8B4CE9CA-ECB7-47D1-845E-E1167FFB3F1B}
3.5	{3ABF6865-E84E-4DAB-B730-0EB9E8F37EB1}
4.0	{02885557-ACA5-4B6F-85D2-3F1A9B8580F5}
4.5	{BB0A384B-10C1-478A-8A3C-538B74590484}
4.6	{2D13D1AD-856F-4C63-BBF1-C2963197F4D0}

CHAPTER 5

Removing the software

SMART Product Drivers

Version	Product code
10.0.124.0	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.131.0	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.163.1	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.165.1	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.186.2	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.188.3	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.232.4	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.255.5	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.314.5	{FF7A64AB-214A-47D1-95E7-742BCBA7F6C9}
10.0.392.6	{00C68967-9790-40DA-86F7-FDB248A5CDB1}
10.0.528.7	{AA9C1126-50DD-4993-9CDC-0BED8167293C}
10.0.532.7	{984EAE92-6043-451A-B786-9327FF165310}
10.6.48.0	{2623A1E3-478A-4F4A-A522-3A3D784A0C9C}
10.6.106.1	{487F1117-8BDE-4518-A798-015172AE0410}
10.6.175.2	{333B0B76-FC96-4C51-9AF6-B6EFA15ACE99}
10.7.81.0	{1355416A-967D-47C5-823D-D493C3E0B97C}
10.7 SP1	{4CE6C6E8-0DAD-4757-86ED-7FB4035BA98B}
10.8	{67E6410C-1E97-4D03-BEC2-8E83323A6BBD}
11.0	{E3189F44-F7BD-4F96-B756-A0AEFAF61D3A}
11.1	{E91FBB79-D736-4834-A1AB-2A5CDD2DB7E7}

SMART Ink

Version	Product code
1.0	{4A1F2472-6164-43FA-9D2F-B35E71A8DF32}
1.1	{4A1F2472-6164-43FA-9D2F-B35E71A8DF32}
1.1 SP1	{F0E390A2-AB03-4077-83C4-F12D3A65493D}

CHAPTER 5

Removing the software

SMART Common Files

Version	Product code
2011 (10.8)	{0E5DD7A3-BE29-430C-970B-C553F4A58C39}
2012 (11.0)	{ED2455F7-6AA6-4D3C-85E9-A72297DD7051}
2013 (11.1)	{3D7235B2-3305-4FE1-A9A1-5F8AC2F33122}
2013 (11.2)	{9057211D-439A-4C0D-95DE-498CF54ADF8C}

Appendix A

Windows Installer properties and parameters

Properties	43
Parameters	54
Examples	55

Properties

The following are properties for the installation package.

Property	Allowed values	Notes
General properties		
TRANSFORMS	[String]: A language MST file for the installation (see <i>Installation language files and codes</i> on page 57).	Ensure the specified MST file is in the same folder as the MSI file. This property defines the language of the installer's user interface and the installed software's icons and shortcuts. It doesn't define the installed software's user interface language. The installed software uses the computer's operating system language if it's supported, or English (U.S.) if not. You can also use the TRANSFORMS property to apply an MST file created by SMART Install Manager (see <i>Using SMART Install Manager</i> on page 5) or a third-party tool.

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
ACTIVATE_LICENSE	1 (default): Register the product keys and automatically activate the software. [Empty string]: Register the product keys but don't automatically activate the software.	You must include the product key properties for the software you're installing for this property to work. For mass activation information, see <i>Activating the software after installation</i> on page 21.
INSTALL_BOARD	1: Install SMART Product Drivers.	Installing SMART Product Drivers also installs SMART Ink.
INSTALL_NOTEBOOK	1: Install SMART Notebook software.	
NB_PROD_KEY	[String]: The 22- or 25-character product key for SMART Notebook software you received from SMART.	As of version 11.1, you don't need to activate SMART Notebook software. SMART provides you with the right to use this software when you purchase a SMART interactive product. If you want to use SMART Notebook software with a device that isn't a SMART interactive product, you must purchase a product key. This property automatically appears in the <i>Product Key</i> box in the activation wizard if you choose not to include the ACTIVATE_LICENSE property.
INSTALL_RESPONSE	1: Install SMART Response software.	If you include the INSTALL_RESPONSE property, Windows Installer installs SMART Notebook software even if you don't include the INSTALL_NOTEBOOK property.
RESP_PROD_KEY	[String]: The 22- or 25-character product key for SMART Response software you received from SMART if students use SMART Notebook SE software or SMART Response VE Internet-enabled devices to answer questions.	This property automatically appears in the <i>Product Key</i> box in the activation wizard if you choose not to include the ACTIVATE_LICENSE property.
ENABLE_MATH_TRIAL	1: Install SMART Notebook Math Tools software.	If you include the ENABLE_MATH_TRIAL property, Windows Installer installs SMART Notebook software even if you don't include the INSTALL_NOTEBOOK property.

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
MATH_PROD_KEY	[String]: The 22- or 25-character product key for SMART Notebook Math Tools software you received from SMART.	This property automatically appears in the <i>Product Key</i> box in the activation wizard if you choose not to include the ACTIVATE_LICENSE property.
ENABLE_MR_TRIAL	1: Install 3D Tools for SMART Notebook software.	If you include the ENABLE_MR_TRIAL property, Windows Installer installs SMART Notebook software even if you don't include the INSTALL_NOTEBOOK property.
MIXED_PROD_KEY	[String]: The 22- or 25-character product key for 3D Tools for SMART Notebook software you received from SMART.	This property automatically appears in the <i>Product Key</i> box in the activation wizard if you choose not to include the ACTIVATE_LICENSE property.
INSTALLDIR	[String]: The path to your preferred folder for the software.	If you specify a folder, include a back slash (\) at the end of the path. If you don't specify a folder, Windows Installer installs the software in [Program files]\SMART Technologies\ Education Software where [Program files] is C:\Program Files for 32-bit versions of Windows operating systems or C:\Program Files (x86) for 64-bit versions of Windows operating systems.
DESKTOP_ICONS	1 (default): Include shortcuts to the software on the desktop. [Empty string]: Don't include shortcuts to the software on the desktop.	
SPU properties		
INSTALL_SPU	1 (default): Install SPU in Full mode. 2: Install SPU in Dashboard mode. 0: Don't install SPU.	In Full mode, users can view the installed versions of SMART software as well as their product keys, and download and install updates. In Dashboard mode, users can view only the installed versions of SMART software and their product keys.

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
SPU_TIME_FRAME	[Integer]: The time in days (1 to 60) between SPU checks.	By default, SPU checks for product updates every 30 days. This property is applicable only if you install SPU.
PRODUCT_NOTIFICATION	1 (default): Notify the user when updates are available from SPU. 0: Don't notify the user when updates are available from SPU.	This property is applicable only if you install SPU.
Customer Experience Program properties		
CUSTOMER_LOGGING	0: Disable the Customer Experience Program. 1 (default): Enable the Customer Experience Program.	

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
SMART Notebook software properties		
CONTENT_TARGET_PATH CONTENT_SOURCE_PATH NETWORK_CONTENT	<p>If you're installing Gallery content on each user's computer from the SMART website (option 1):</p> <ul style="list-style-type: none"> Set CONTENT_TARGET_PATH to the path of the folder where you want to install the Gallery content (if you don't want to use the default folder). <p>If you're installing Gallery content on each user's computer from a folder on your school's network (option 2):</p> <ul style="list-style-type: none"> Set CONTENT_SOURCE_PATH to the path of the folder on your school's network that contains the Gallery Essentials and Lesson Activity Toolkit folders. Set CONTENT_TARGET_PATH to the path of the folder where you want to install the Gallery content (if you don't want to use the default folder). <p>If you're installing Gallery content in a central location (option 3):</p> <ul style="list-style-type: none"> Set NETWORK_CONTENT to 1. Set CONTENT_TARGET_PATH to the path of the the folder on your school's network that contains the Gallery Essentials and Lesson Activity Toolkit folders. 	<p>For more information on the three options, see <i>Installing Gallery content</i> on page 62.</p> <p>If you select option 3, Windows Installer ignores the FULL_GALLERY and *_CONTENT properties.</p> <p>The default Gallery folder on Windows 7 and Windows 8 computers is [All users profile folder]\SMART Technologies.</p> <p>The default Gallery folder on Windows XP computers is [All users profile folder]\Application Data\SMART Technologies.</p>
FULL_GALLERY	1: Install the full Gallery Essentials collection.	
ADMIN_CONTENT	1: Install the Administration and Evaluation category.	Don't include this property if you included the FULL_GALLERY category.
ARTS_CONTENT	1: Install the Arts category.	Don't include this property if you included the FULL_GALLERY category.

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
ENGLISH_CONTENT	1: Install the English and Language Arts category.	Don't include this property if you included the FULL_GALLERY category.
GEOGRAPHY_CONTENT	1: Install the Geography category.	Don't include this property if you included the FULL_GALLERY category.
HISTORY_CONTENT	1: Install the History category.	Don't include this property if you included the FULL_GALLERY category.
MATH_CONTENT	1: Install the Mathematics category.	Don't include this property if you included the FULL_GALLERY category.
PEOPLE_CONTENT	1: Install the People and Culture category.	Don't include this property if you included the FULL_GALLERY category.
SCIENCE_CONTENT	1: Install the Science and Technology category.	Don't include this property if you included the FULL_GALLERY category.
SPECIAL_CONTENT	1: Install the Special Needs category.	Don't include this property if you included the FULL_GALLERY category.
SPORTS_CONTENT	1: Install the Sports and Recreation category.	Don't include this property if you included the FULL_GALLERY category.
LAT_CONTENT	1: Install the Lesson Activity Toolkit collection.	
TEAM_CONTENT_PATH	[String]: Specify the path to the Team Content folder, which is a location on your school's network where users can store shared content.	For information on creating a Team Content folder, see <i>Creating or connecting to Team Content folders</i> on page 72. You must specify a path to an existing folder in this property.
MY_CONTENT	[String]: Specify the path to the My Content folder, which is a location on the user's computer where he or she can store individual content.	You can include environment variables in the path. This property is useful if you want to store content in a shared network folder so users can access their My Content folder from any computer on the network.

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
PRINT_CAPTURE	1 (default): Install the Print Capture Driver. [Empty string]: Don't install the Print Capture Driver.	The Print Capture Driver is a printer driver that enables users to export content from other programs to SMART Notebook software by using the SMART Notebook Document Writer.
INSTALL_DOCCAM_DRIVERS	1 (default): Enable the registration of SMART Document Camera drivers. [Empty string]: Disable the registration of SMART Document Camera drivers.	Disable the registration of SMART Document Camera drivers if they conflict with existing third-party drivers on the computer.
GPU_ENABLED	1 (default): Enable hardware acceleration. 0: Disable hardware acceleration.	Through hardware acceleration, SMART Notebook software completes some tasks using your computer's graphics processing unit (GPU) rather than its central processing unit (CPU). Hardware acceleration improves the performance of SMART Notebook software on most computers. However, hardware acceleration can cause issues on some computers, such as content not displaying correctly and SMART Notebook software not responding. If users are encountering these issues, you can disable hardware acceleration.
COPY_TUTORIAL	1 (default): Copy the SMART Notebook software tutorial file to the user's <i>Documents</i> folder. 0: Don't copy the SMART Notebook software tutorial file to the user's <i>Documents</i> folder.	The SMART Notebook software tutorial file opens when a user first starts the software. It demonstrates how to use the software and what's new in the current version of the software. If there is limited space on users' computers, you can choose to not copy the tutorial file to their <i>Documents</i> folders.

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
SMART Response software properties		
RESPONSE_MODE	<p>1: Install the software in standard mode. (Students answer questions using Senteo or SMART Response clickers.)</p> <p>2: Install the software in CE mode. (Students answer questions using SMART Notebook SE software.)</p> <p>4: Install the software in LE mode. (Students answer questions using SMART Response LE clickers.)</p> <p>8 (default): Install the software in PE mode. (Students answer questions using SMART Response PE clickers.)</p> <p>16: Install the software in XE mode. (Students answer questions using SMART Response XE clickers.)</p> <p>32: Install the software in VE mode. (Students answer questions using SMART Response VE Internet-enabled devices.)</p> <p>64: Install the software in Mixed mode. (Students answer questions using Senteo, SMART Response, SMART Response LE, SMART Response PE or SMART Response XE clickers or SMART Notebook SE software.)</p> <p>128: Install the software in Mixed mode with additional support for SMART Response VE Internet-enabled devices.</p>	<p>You or the user can change the mode after installation using the SMART Response Setup Tool.</p>
LOSU_RDM	<p>1 (default): Add the SMART Response icon to the notification area when the user logs on.</p> <p>[Empty string]: Don't add the SMART Response icon to the notification area when the user logs on.</p>	

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
LOSU_RHWS	1 (default): Start the SMART Response hardware service when the user logs on. [Empty string]: Don't start the SMART Response hardware service when the user logs on.	
INSTALL_DATABASE	1 (default): Install the SMART Response education standards database. [Empty string]: Don't install the SMART Response education standards database.	
FILE_PORT	[String]: The port you want to use to receive assessment information from SMART Notebook SE software.	This property is applicable only if you're installing SMART Response software in CE mode.
SECURE_BASE_PORT	[String]: The secure port you want to use to receive assessment information from SMART Notebook SE software.	This property is applicable only if you're installing SMART Response software in CE mode.
CERTIFICATE_FOLDER	[String]: The path to and file name of the security certificate for Diffie-Hellman encryption.	This property is applicable only if you're installing SMART Response software in CE mode.
VE_SERVER_WEBSITE	[String]: The URL of the SMART Response VE Server (for example, http://response.example.com).	
SMART Product Drivers properties		
ENABLE_STPCS	1 (default): Use Tablet PC functionality with the SMART Board interactive whiteboard without connecting a Tablet PC. [Empty string]: Don't use Tablet PC functionality with the SMART Board interactive whiteboard without connecting a Tablet PC.	This property is applicable for the Windows 7 operating systems. It has no effect on other operating systems. If you specify [Null], users don't have touch support at the Windows logon screen.
LOSU_BRDTOOLS	1 (default): Start SMART Board Tools when the user logs on. [Empty string]: Don't start SMART Board Tools when the user logs on.	

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
LOSU_INK	1 (default): Start SMART Ink when the user logs on. [Empty string]: Don't start SMART Ink when the user logs on.	
DEFAULT_PDF	1: Set SMART Ink Viewer as the default PDF viewer. [Empty string] (default): Don't set SMART Ink Viewer as the default PDF viewer.	
LOSU_VANTAGE	[Empty string] (default): Don't enable the SMART Vantage and SNMP services. 1: Enable the SMART Vantage and SNMP services and, if you're installing the software in UI mode, start the service after the installation is complete.	Enable these services if your school or district is using SMART Vantage software.
INSTALL_UNSIGNED_DRIVERS	1: Enable the registration of SMART Document Camera and unsigned third-party drivers. 0 (default): Disable the registration of SMART Document Camera and unsigned third-party drivers.	If you enable the registration of unsigned third-party drivers, the installation process could ask users if they trust the makers of the drivers during installation. This can cause issues if you deploy the installation in Silent mode. Therefore, it's best to disable the registration of third-party drivers if you deploy the installation in Silent mode.
Language pack properties		
Don't select more than 20 language packs (see smarttech.com/kb/170081).		
AR	1: Install the Arabic language pack.	
ZH_CN	1: Install the Chinese (Simplified) language pack.	
ZH_TW	1: Install the Chinese (Traditional) language pack.	
CS	1: Install the Czech language pack.	
DA	1: Install the Danish language pack.	
NL	1: Install the Dutch language pack.	

APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
EN_GB	1: Install the English (UK) language pack.	
FI	1: Install the Finnish language pack.	
FR	1: Install the French language pack.	
DE	1: Install the German language pack.	
EL	1: Install the Greek language pack.	
HE	1: Install the Hebrew language pack.	
HU	1: Install the Hungarian language pack.	
IT	1: Install the Italian language pack.	
MS	1: Install the Malay language pack.	
NB	1: Install the Norwegian language pack.	
PL	1: Install the Polish language pack.	
PT_BR	1: Install the Portuguese (Brazil) language pack.	
RO	1: Install the Romanian language pack.	
RU	1: Install the Russian language pack.	
ES	1: Install the Spanish (Spain) language pack.	
SV	1: Install the Swedish language pack.	
TR	1: Install the Turkish language pack.	


APPENDIX A

Windows Installer properties and parameters

Property	Allowed values	Notes
Internet access properties		
ACC	[Integer]: Enable Internet access for specified components. <ul style="list-style-type: none">• 0: No components• 1: Gallery Setup• 2: Language Setup• 3: Gallery Setup and Language Setup• 13: All components except Language Setup• 14: All components except Gallery Setup• 15 (default): All components	

Parameters

The following are the standard Windows Installer parameters for the msiexec command.

Parameter	Use
/q	Hide the installation wizard.  NOTE This is Silent mode.
/qb	Show a basic installation wizard.
/qb!	Show a basic installation wizard without a Cancel button.
/qb+	Show a basic installation wizard with a dialog box signaling the end of the installation.
/qb+!	Show a basic installation wizard without a Cancel button but with a dialog box signaling the end of the installation.
/qr	Show a reduced installation wizard.
/qf	Show the full installation wizard, including a dialog box signaling the end of the installation or the <i>Fatal Error</i> , <i>User Exit</i> or <i>Exit</i> dialog box.
/qn	Hide the installation wizard and the dialog box signaling the end of the installation.
/qn+	Hide the installation wizard but show the dialog box signaling the end of the installation.

APPENDIX A

Windows Installer properties and parameters

Examples

The following example installs SMART Notebook software and SMART Product Drivers in Silent mode:

```
msiexec /i "[Path]\SMARTEducationSoftware.msi" INSTALL_NOTEBOOK=1  
INSTALL_BOARD=1 /q
```

The following example installs SMART Response software in Silent mode, providing a product key and automatically activating the software upon completion of the installation:

```
msiexec /i "[Path]\SMARTEducationSoftware.msi" INSTALL_RESPONSE=1  
RESP_PROD_KEY=[22- or 25-character product key] ACTIVATE_LICENSE=1  
/q
```

The following example installs SMART Notebook software in Silent mode, linking to centrally located Gallery content:

```
msiexec /i "[Path]\SMARTEducationSoftware.msi" INSTALL_NOTEBOOK=1  
NETWORK_CONTENT=1 CONTENT_TARGET_PATH="\\SchoolServer\Gallery" /q
```

The following example installs SMART Response software in CE mode in Silent mode:

```
msiexec /i "[Path]\SMARTEducationSoftware.msi" INSTALL_RESPONSE=1  
RESPONSE_MODE=2 /q
```


Appendix B

Language files and codes

Installation language files and codes	57
Language packs	58

Installation language files and codes

Language	Code	File
English (U.S.)	1033	1033.mst
English (UK)	2057	2057.mst
Arabic	1025	1025.mst
Chinese (Simplified)	2052	2052.mst
Chinese (Traditional)	1028	1028.mst
Czech	1029	1029.mst
Danish	1030	1030.mst
Dutch	1043	1043.mst
Finnish	1035	1035.mst
French (France)	1036	1036.mst
German	1031	1031.mst
Greek	1032	1032.mst
Hebrew	1037	1037.mst
Hungarian	1038	1038.mst
Italian	1040	1040.mst
Norwegian	1044	1044.mst
Polish	1045	1045.mst
Portuguese (Brazil)	1046	1046.mst
Romanian	1048	1048.mst

APPENDIX B

Language files and codes

Language	Code	File
Russian	1049	1049.mst
Spanish (Spain)	1034	1034.mst
Swedish	1053	1053.mst
Turkish	1055	1055.mst

Language packs

File	Code
arabic_language_pack.msi	{C23C343B -ADAF -4716 -88A3 -7C83C834F77D}
chinese_(simplified)_language_pack.msi	{138D3318 -7D69 -402D -8F58 -0622ECD91571}
chinese_(traditional)_language_pack.msi	{CE1E8743 -3C65 -40F7 -B3DF -A4FC38224584}
czech_language_pack.msi	{9AF87867 -96D2 -4BA2 -BB26 -F0E6581C0C4A}
danish_language_pack.msi	{FCE289E7 -FCED -4F74 -9071 -EE03E176FC90}
dutch_language_pack.msi	{E4E2061B -2A6D -4F95 -A508 -DE546E60799B}
english_(united_kingdom)_language_pack.msi	{2B2404AA -35DF -4BF3 -A8F2 -BAFC8F7174C5}
finnish_language_pack.msi	{6EE5C940 -344A -40D3 -92BA -E8EAE1E27465}
french_language_pack.msi	{617193F6 -4507 -4A91 -AE67 -B0FBAB5AA431}
german_language_pack.msi	{FE34C5E6 -CC3D -4C26 -969A -0C2CAFB34658}
greek_language_pack.msi	{DBC33BCC -1AB1 -4097 -81D8 -F93184E7D2BE}
hebrew_language_pack.msi	{90203EF6 -AB6A -46F4 -8E80 -DE60F753A0E8}
hungarian_language_pack.msi	{73CF09CD -E469 -4EDC -A05C -73C2E34F0141}
italian_language_pack.msi	{269680E3 -C467 -4586 -BB3C -34309FB52D51}
malaysian_language_pack.msi	{265909C5 -F12F -4AD8 -B6D8 -82F416F57BFA}
norwegian_language_pack.msi	{808F3C35 -A060 -4A84 -818D -C19FE355E56D}
polish_language_pack.msi	{EED39364 -CBC2 -4447 -9D5A -C3915232D552}
portuguese_(brazil)_language_pack.msi	{0D535C96 -A6B6 -4978 -B173 -E9050C0E0E12}
romanian_language_pack.msi	{52B5DBD5 -185F -4662 -B5BC -99BDFC9CFBC2}

APPENDIX B

Language files and codes

File	Code
russian_language_pack.msi	{FB9DCEDC -F5FF 46D6 -8595 -E8DB1262DFAF}
spanish_language_pack.msi	{89897CD3 -1F77 -41F4 -94D8 -BA984F5D74A9}
swedish_language_pack.msi	{4F57BF84 -3539 4FCF -9517 -19CDBFA99606}
turkish_language_pack.msi	{7F7E68FA -2B88 47F3 -AC9F -81E36B145D4D}

Appendix C

Installing and maintaining Gallery content

Installing Gallery content	62
Installing Gallery content on each computer from the SMART website	62
Configuring Gallery content using the command line interface	62
Configuring Gallery content using SMART Install Manager	62
Installing Gallery content on each computer from a folder on your school's network	63
Downloading Gallery content	63
Configuring Gallery content using the command line interface	64
Configuring Gallery content using SMART Install Manager	64
Installing Gallery content in a central location	64
Downloading Gallery content	64
Configuring Gallery content using the command line interface	65
Configuring Gallery content using SMART Install Manager	65
Modifying Gallery content	66
Commands	67
Flags	68
Parameters	69
Examples	70
Downloading a Gallery collection	70
Downloading certain categories of a Gallery collection	70
Installing a Gallery collection	70
Installing certain categories of a Gallery collection	70
Registering installed Gallery collections	70
Removing a Gallery collection	71
Changing Gallery content locations	71
Starting the software in Administration mode	71
Changing the location of the My Content folder	71
Creating or connecting to Team Content folders	72
Connecting to an RSS feed	74

APPENDIX C

Installing and maintaining Gallery content

Gallery content includes the following:

- Gallery Essentials, which is a collection of educational photos and other images, audio files, and Adobe Flash Player compatible files.
- Lesson Activity Toolkit, which contains objects teachers can use to create their own lesson activities.

You can access Gallery content from the *Gallery* tab in SMART Notebook software.

Installing Gallery content

There are three options for installing Gallery content.

Option	Description
1	Install Gallery content on each user's computer from the SMART website.
2	Install Gallery content on each user's computer from a folder on your school's network.
3	Install Gallery content in a central location, and then configure the software to refer to that location.



TIP

Option 3 is ideal for environments where hard disk space on computers is limited.

Installing Gallery content on each computer from the SMART website

Configuring Gallery content using the command line interface

If you're customizing the software using the command line interface, include the `CONTENT_TARGET_PATH` property in the installation package customization. You can also include the `FULL_GALLERY` and `*_CONTENT` properties to define the Gallery content you want to install. For more information on these properties, see *Windows Installer properties and parameters* on page 43.

Configuring Gallery content using SMART Install Manager

If you're customizing the software using SMART Install Manager, complete the procedure in this section to configure Gallery content.

APPENDIX C

Installing and maintaining Gallery content

To configure Gallery content using SMART Install Manager

1. Open the software installation package in SMART Install Manager.
2. Click **Product Selection**.

The *Product Selection* page appears.

3. Select **SMART Notebook** (and any other products you want to install).
4. Click **Gallery Content**.

The *Gallery Content* page appears.

5. Click **Install the Gallery on each computer**.
6. In the *Destination location* box, type the path of the location on each computer where you want to install the Gallery collections (if you don't want to use the default folder).
7. Select the Gallery collections you want to install.
8. Publish your changes as an MST file, and then deploy the MSI and MST files.

Installing Gallery content on each computer from a folder on your school's network

Downloading Gallery content

Download Gallery content from the Internet to a folder on your school's network following the procedures in this section, and then install the content on each computer from this folder.

To download Gallery content from the Internet

1. Open the software installation package in SMART Install Manager.
2. Click **Product Selection**.

The *Product Selection* page appears.

3. Select **SMART Notebook**.
4. Click **Gallery Content**.

The *Gallery Content* page appears.

5. Click **Install the Gallery on each computer**.
6. Click **Download**, and then select the location to download the Gallery content to.
7. Click **OK** to start the download.
8. Click **Close** when the download is complete.

APPENDIX C

Installing and maintaining Gallery content

Configuring Gallery content using the command line interface

If you're customizing the software using the command line interface, include the `CONTENT_SOURCE_PATH` and `CONTENT_TARGET_PATH` properties in the installation package customization. You can also include the `FULL_GALLERY` and `*_CONTENT` properties to define the Gallery content you want to install. For more information on these properties, see *Windows Installer properties and parameters* on page 43.

Configuring Gallery content using SMART Install Manager

If you're customizing the software using SMART Install Manager, complete the procedure in this section to configure Gallery content.

To configure Gallery content using SMART Install Manager

1. Open the software installation package in SMART Install Manager.
2. Click **Product Selection**.
The *Product Selection* page appears.
3. Select **SMART Notebook** (and any other products you want to install).
4. Click **Gallery Content**.
The *Gallery Content* page appears.
5. Click **Install the Gallery on each computer**.
6. In the *Source location* box, type the path to the folder on your school's network that contains the Gallery content (if you downloaded Gallery collections to your school's network).
7. In the *Destination location* box, type the path of the location on each computer where you want to install the Gallery collections (if you don't want to use the default folder).
8. Clear the Gallery collections you don't want to install.
9. Publish your changes as an MST file, and then deploy the MSI and MST files.

Installing Gallery content in a central location

Downloading Gallery content

To place and use Gallery content in a central location on your school's network, you must first download the content from the Internet to that location by performing one of the procedures in this section.

APPENDIX C

Installing and maintaining Gallery content

To download Gallery content from the Internet

1. Open the software installation package in SMART Install Manager.
2. Click **Product Selection**.
The *Product Selection* page appears.
3. Select **SMART Notebook**.
4. Click **Gallery Content**.
The *Gallery Content* page appears.
5. Click **Share Gallery content with all computers from a common network location**.
6. If you want to download the Gallery Essentials collection, click **Install** beside *Essentials for Educators*, and then follow the on-screen instructions.
7. If you want to download the Lesson Activity Toolkit collection, click **Install** beside *Lesson Activity Toolkit*, and then follow the on-screen instructions.

Configuring Gallery content using the command line interface

If you're customizing the software using the command line interface, include the NETWORK_CONTENT and CONTENT_TARGET_PATH properties in the installation package customization. For more information on these properties, see *Windows Installer properties and parameters* on page 43.

Configuring Gallery content using SMART Install Manager

If you're installing the software using SMART Install Manager, complete the procedure in this section to configure Gallery content.

To configure Gallery content using SMART Install Manager

1. Open the software installation package in SMART Install Manager.
2. Click **Product Selection**.
The *Product Selection* page appears.
3. Select **SMART Notebook** (and any other products you want to install).
4. Click **Gallery Content**.
The *Gallery Content* page appears.
5. Click **Share Gallery content with all computers from a common network location**.
6. In the *Gallery location* box, type the path to the folder on your school's network that contains the Gallery content.
7. Publish your changes as an MST file, and then deploy the MSI and MST files.

Modifying Gallery content

After installing the software, you can modify Gallery content using Gallery Setup. This program is available under **[Programs folder]Common Files\SMART Technologies\SMART Product Update** and you can run it from a graphical user interface or the command line.

To run Gallery Setup from a graphical user interface

1. In Windows Explorer, browse to **[Programs folder]Common Files\SMART Technologies\SMART Product Update**.

2. Double-click **Gallery Setup.exe**.

The *Select a Gallery* dialog box appears.

3. Select the Gallery collection you want to modify, and then click **OK**.

Gallery Setup starts.

4. In the *Content* tab, select the categories you want to include and clear the categories you don't want to include.

5. In the *Languages* tab, select the language packs you want to include and clear the language packs you don't want to include.



TIP

To see the language pack names in English, clear the **Show native names** check box.

6. In the *Installation folder for Gallery content* box, type the path to the folder where you want to store the Gallery collection.

7. Click **OK**.

Gallery Setup updates the selected Gallery collection.

8. Click **Finish**.

APPENDIX C

Installing and maintaining Gallery content

To run Gallery Setup from the command line

1. Open a Command Prompt window.
2. Type the following command:

```
"[Path]\Gallery Setup.exe" [Command] [Flags] [Parameters]
```

Where:

- *[Path]* is the path to the **Gallery Setup.exe** file.

NOTE

The default path is **[Programs folder]\Common Files\SMART Technologies\SMART Product Update**.

- *[Command]* is a command (see *Commands* below).
- *[Flags]* is one or more optional flags for the command (see *Flags* on the next page).
- *[Parameters]* is one or more parameters for the command (see *Parameters* on page 69).

NOTES

- For example commands, see *Examples* on page 70.
- Gallery Setup doesn't support Windows Installer options.

3. Press ENTER.

Gallery Setup updates the selected Gallery collection.

Commands

The following table defines available commands for Gallery Setup.

Command	Purpose	Notes
<code>--downloadall</code>	Download the entire Gallery collection to a source folder.	
<code>--downloadsome</code>	Download specific categories of the Gallery collection to a source folder.	Specify which categories you want to download using the <code>--c</code> parameter.
<code>--installall</code>	Install the entire Gallery collection from the source folder to the destination folder.	If you omit the <code>--source</code> parameter, Gallery Setup doesn't use a default path unless you provide the <code>--allowdownload</code> flag. If you omit the <code>--destination</code> parameter, Gallery Setup uses the default path defined in the Gallery collection's configuration.

APPENDIX C

Installing and maintaining Gallery content

Command	Purpose	Notes
--installsome	Install specific categories of the Gallery collection from the source folder to the destination folder.	If you omit the --source parameter, Gallery Setup doesn't use a default path unless you provide the --allowdownload flag. If you omit the --destination parameter, Gallery Setup uses the default path defined in the Gallery collection's configuration. Specify which categories you want to download using the --c parameter.
--teamcontent	Register additional Team Content at the folder specified by the --destination parameter.	You must enter an existing Gallery destination.
--mycontent	Set the default My Content path to the folder specified by the --destination parameter.	
--repair	Attempt to detect and optionally remove corrupted galleries.	Include the --allowcleanup parameter to delete corrupted galleries.
--uninstall	Remove the installed Gallery collection.	
--register	Define the location of Gallery content.	Use this command with the --destination and --configuration parameters, or with the --guid parameter.

Flags

The following table defines available flags for Gallery Setup.

Flag	Purpose	Notes
--remote	Prevent Gallery Setup from registering itself with the SMART software.	This disables the <i>Check for Updates</i> feature and prevents users from updating the content.
--verbose	Output progress of operations to standard output when working in command line mode.	
--overrideproxy	Set Gallery Setup to ignore default (system-wide or previously set) proxy settings where applicable, and use a proxy specified by the --proxy parameter (server:port format), using a user name and password provided by the --username and --password parameters.	You can set a user name and password without --overrideproxy , and still use it for authentication with the default proxy.
--allowdownload	Download the Gallery collection from the default URL specified in the configuration.	Use this flag with the --installall or --installsome parameters when you omit the --source parameter.
--forcedest	Share Gallery content across users.	

APPENDIX C

Installing and maintaining Gallery content

Parameters

The following table defines available parameters for Gallery Setup.

Parameter	Value	Purpose	Notes
<code>--source</code>	<i>[Path]</i>	Define the path to a local or network folder where the Gallery content is stored before installation.	If you omit this parameter, the installation program uses the default URL from the Gallery configuration, as specified by the <code>--guid</code> or <code>--configuration</code> parameters.
<code>--destination</code>	<i>[Path]</i>	Define the path to a local or network folder where Gallery Setup installs the Gallery content.	If you omit this parameter, Gallery Setup uses this default path found in the computer's registry.
<code>--configuration</code>	<i>[Path]</i>	Define the full path to a <code>.gallerycollection</code> file, including the file name.	If you omit this parameter, you must provide the <code>--guid</code> parameter to specify a known Gallery collection.
<code>--proxy</code>	<i>[Server:Port]</i>	Specifies the proxy used by Gallery Setup when you include the <code>--overrideproxy</code> flag.	
<code>--guid</code>	<i>[Identifier]</i>	Specify a known Gallery collection to work with.	A Gallery collection is known if Gallery Setup has already opened its <code>.gallerycollection</code> file. In this situation, use this parameter instead of the <code>--configuration</code> parameter.
<code>--c</code>	<i>[Alias]</i>	Download or install the category of the Gallery collection identified by <i>[Alias]</i> . Use this parameter with the <code>--downloadsome</code> and <code>--installsome</code> commands.	You can include several <code>--c</code> parameters in a single command. Valid <i>[Alias]</i> values for the Gallery Essentials collection are: <ul style="list-style-type: none">• admin• arts• english• geography• history• math• people• science• special• sports
<code>--ui</code>	N/A	Specify the user interface level. Use this parameter to show a progress indicator and error messages. If you don't include this parameter, Gallery Setup works silently without a user interface.	Use <code>--register</code> with the <code>--downloadall</code> or <code>--downloadsome</code> parameters to display the full user interface. Use <code>--register</code> with the <code>--installall</code> or <code>--installsome</code> parameters to display a minimal user interface.

APPENDIX C

Installing and maintaining Gallery content

Examples

Downloading a Gallery collection

Use the following command to copy a Gallery collection from a specific source folder to a common destination folder:

```
"[Path]\Gallery Setup.exe" --downloadall --destination "[Path]"  
--configuration "[Path]"
```

Downloading certain categories of a Gallery collection

Use the following command to copy only certain categories of a Gallery collection from a specific source folder to a common destination folder:

```
"[Path]\Gallery Setup.exe" --downloadsomesome --destination "[Path]"  
--configuration "[Path]" --c "[Alias 1]" --c "[Alias 2]"
```

Installing a Gallery collection

Use the following command to install a Gallery collection from the default source (as defined in the .gallerycollection file) to a specific destination folder:

```
"[Path]\Gallery Setup.exe" --installall --allowdownload --destination  
"[Path]" --configuration "[Path]"
```

Installing certain categories of a Gallery collection

Use the following command to install certain categories of a Gallery collection from the default source (as defined in the .gallerycollection file) to a specific destination folder:

```
"[Path]\Gallery Setup.exe" --installssome --remote --source "[Path]"  
--allowdownload --destination "[Path]" --configuration "[Path]"  
--c "[Alias 1]" --c "[Alias 2]"
```

Registering installed Gallery collections

If you installed Gallery collections to a network location, use the following command to register the Gallery content with the SMART software on each user's computer:

```
"[Path]\Gallery Setup.exe" --register --remote --forcedest  
--destination "[Path]" --configuration "[Path]"
```

APPENDIX C

Installing and maintaining Gallery content

Removing a Gallery collection

Use the following command to remove the Gallery Essentials collection:

```
"[Path]\Gallery Setup.exe" --uninstall --guid gallery.smarttech.com
```

TIP

To automate the removal of a Gallery collection, you can use the command in a batch file as a startup script.

Changing Gallery content locations

After installing the software, you can do the following:

- Change the location of the **My Content** folder.
- Create or connect to a **Team Content** folder.
- Connect to an RSS feed.

Starting the software in Administration mode

Before you can maintain content folders, you must start the software in Administration mode.

To start SMART Notebook software in Administration mode

1. Open a Command Prompt window.
2. Type the following command:

```
"[Path]\Notebook.exe" /admin
```

Where *[Path]* is the path to the SMART Notebook software program folder.

NOTE

The default path is *[Programs folder]\SMART Technologies\Education Software*.

3. Press ENTER.

SMART Notebook software starts in Administration mode.

Changing the location of the My Content folder


The **My Content** folder is a location where teachers and students can store content for their individual use.

You can specify the location of the **My Content** folder during installation or afterward.

APPENDIX C

Installing and maintaining Gallery content

To change the location of the My Content folder after installation

1. Start the software in Administration mode (see *Starting the software in Administration mode* on the previous page).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

4. Click **Browse**.

The *Browse For Folder* dialog box appears.

5. Browse to and select the new **My Content** folder, and then click **OK**.
6. Click **Close**.
7. Close the software.


Creating or connecting to Team Content folders

All users can create new content and save it in their **My Content** folders. To allow users to share content, you must create or connect to a **Team Content** folder.

TIP

If you create a **Team Content** folder on a computer's hard disk, the folder is available only to users of that computer. However, if you create a **Team Content** folder on a server, the folder is available to all users on the school's network with read and write access to the folder.

To create a new Team Content folder

1. Start the software in Administration mode (see *Starting the software in Administration mode* on the previous page).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

4. Click **Create New**.

The *Browse For Folder* dialog box appears.

APPENDIX C

Installing and maintaining Gallery content

5. Browse to and select the folder you want to designate as a **Team Content** folder, and then click **OK**.




NOTE

The software adds an **imsmanifest.xml** file to the **Team Content** folder after you click **OK**. This file identifies the folder as a **Team Content** folder.

6. Click **Close**.
7. Close the software.


To connect to an existing Team Content folder

1. Start the software in Administration mode (see *Starting the software in Administration mode* on page 71).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

4. Click **Add Existing**.
The *Browse For Folder* dialog box appears.
5. Browse to and select the **Team Content** folder, and then click **OK**.
6. Click **Close**.
7. Close the software.

To disconnect a Team Content folder

1. Start the software in Administration mode (see *Starting the software in Administration mode* on page 71).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

APPENDIX C

Installing and maintaining Gallery content

4. Select the folder in the *Team Content* list, and then click **Remove**.



IMPORTANT

If you installed the Gallery Essentials and Lesson Activity Toolkit collections, folders for those collections appear in the *Team Content* list. Do not remove these folders from the list, or users will not be able to access these collections.


5. Click **Close**.
6. Close the software.

Connecting to an RSS feed

You can connect to a public or private RSS feed to send information to your school's SMART Notebook software and SMART Notebook SE software users through the *Gallery* tab.

RSS is a format for delivering regularly changing web content. Many news-related websites, blogs and other publishers broadcast their content as RSS feeds.

To connect to an RSS feed

1. Start the software in Administration mode (see *Starting the software in Administration mode* on page 71).
2. Click the **Gallery** tab.
3. Click the **Click here for more Gallery options** icon , and then select **Administration: Content Locations**.

The *Administration: Content Locations* dialog box appears.

4. Type the URL of the RSS feed in the *Online Resources* box.
5. Click **Close**.
6. Close the software.

Appendix D

Removing previous versions of SMART Board software

Removing SMART Board software 9.x	75
Removing SMART Board software 8.x	76
Removing SMART Board software 7.x	78
Cleaning the registry	79

If you have version 9.0 or earlier of SMART Board software on your computers, SMART recommends that you remove it before installing new software.

Removing SMART Board software 9.x

You or your predecessor installed SMART Board software 9.x using the Windows Installer 3.1 installation utility.

You can remove SMART Board software 9.x using the installation package (if you still have it) or the product code.

To remove SMART Board software 9.x

Run the following command to remove the software using the installation package:

```
msiexec /x "[Path]\SMART Board Software.msi" [Parameter]
```

Where

- *[Path]* is the path to the **SMART Board Software.msi** file.
- *[Parameter]* is the installation parameter (see *Parameters* on page 54).

OR

APPENDIX D

Removing previous versions of SMART Board software

Run the following command to remove the software using the product code:

```
msiexec /x [Product code] [Parameter]
```

Where

- *[Product code]* is the product code for the version of SMART Notebook software you're removing, including the braces (“{” and “}”).

Version	Product code
9.0.1.57	{D2EC1505-9F11-4A94-9644-DCD0299DE491}
9.1.0.40	{BD6516BA-2314-4F2C-9ECD-29BCB1074AFB}
9.1.3.47	{8D757887-9CD3-4F97-9873-E049E1C264CE}
9.1.4.51	{EE2A5345-CBE2-4932-83B0-D628D0D24AF8}
9.5.x.x	{B72EB184-2A42-4B3C-8F8F-D7EF163829B4}
9.7.x.x	{46486451-E60F-42C3-92D7-796D8594688A}

- *[Parameter]* is the installation parameter (see *Parameters* on page 54).

Removing SMART Board software 8.x

You or your predecessor installed SMART Board software 8.x using the InstallShield® installation utility.

You can remove SMART Board software 8.x by creating a **setup.iss** file and then using the file to remove the software from all computers.



NOTE

You need to create the **setup.iss** file only once. You can then use the file to remove the same version of SMART Board software from other computers on your network using a batch file or startup script.

Before completing the following procedures, determine the product code for the version of SMART Board software installed on the computers.

Version	Product code
8.0.0.52	{7823065C-AA64-425D-A9A3-18BF7B99E944}
8.0.1	{F414173A-7BE1-46C6-811A-51277A4D9E7B}

APPENDIX D

Removing previous versions of SMART Board software

Version	Product code
8.1.0	{155FBC4E-CF09-4698-961B-DF9787E6B8B8}
8.1.1.24	{7AD771BB-B681-4659-B7FA-223FCB1FDF56}
8.1.2.8	{55C574CA-8D71-46F1-9897-98DAE55C0394}
8.1.3.17	{10D2A154-D221-4455-8426-E67D12C092F9}
8.1.4.19	{41CEFD25-0D33-44EA-A19C-5A1EBABFC041}

The product code includes the braces (“{” and “}”).

To create the setup.iss file

1. Run the following command:

```
"C:\Program Files\Common Files\InstallShield\Driver\8\Intel 32\IDriver.exe" /MProductCode /l1033 /r/z-AddRemove --RemoveReg
```

The InstallShield installation utility removes SMART Board software and creates a **setup.iss** file in the root Windows folder.

2. Move the **setup.iss** file to a location where all computers can access it.

To remove SMART Board software 8.x

Run the following command:

```
"C:\Program Files\Common Files\InstallShield\Driver\8\Intel 32\IDriver.exe" /MProductCode /l1033 /s /z-AddRemove -RemoveReg /f1 "[Path to the setup.iss file]\setup.iss"/f2 "[Path to the uninst.log file]\uninst.log"
```

Where

- *[Path to the setup.iss file]* is the path to the **setup.iss** file you created in the previous procedure.
- *[Path to the uninst.log file]* is the path to the log file that the InstallShield installation utility creates when it removes the software.

APPENDIX D

Removing previous versions of SMART Board software

Removing SMART Board software 7.x

You or your predecessor installed SMART Board software 7.x using the InstallShield installation utility.

You can remove SMART Board software 7.x by creating a **setup.iss** file and then using the file to remove the software from all computers.



NOTE

You need to create the **setup.iss** file only once. You can then use the file to remove the same version of SMART Board software from other computers on your network using a batch file or startup script.

Before completing the following procedures, determine the product code for the version of SMART Board software installed on the computers.

Version	GUID
7.0	{72226969-B20E-439E-B0A1-FD1EE5403CCF}
7.1	{93458E57-1D12-4F01-980D-62D5430048D0}
7.1.1	{14AE43DA-37FE-4B73-99C0-D02E01B48837}
7.1.2	{28E27E54-92A5-4717-A4E5-837D7E894AB4}
7.1.3	{FF332803-8B46-4392-A2F4-8790735F7B26}

The product code includes the braces (“{” and “}”).

To create the setup.iss file

1. Run the following command:

```
RunDll32  
C:\PROGRA~1\COMMON~1\INSTAL~1\PROFES~1\RunTime\0701\Intel32\  
Ctor.dll,LaunchSetup "C:\Program Files\InstallShield Installation  
Information\GUID\setup.exe" /r -l0x9 --AddRemove
```

The InstallShield installation utility removes SMART Board software and creates a **setup.iss** file in the root Windows folder.

2. Move the **setup.iss** file to a location where all computers can access it.

APPENDIX D

Removing previous versions of SMART Board software

To remove SMART Board software 7.x

Run the following command:

```
RunDll132
C:\PROGRA~1\COMMON~1\INSTAL~1\PROFES~1\RunTime\0701\Intel32\
Ctor.dll,LaunchSetup "C:\Program Files\InstallShield Installation
Information\GUID\setup.exe" /s -l0x9 --AddRemove /f1"[Path to the
setup.iss file]\setup.iss" /f2"[Path to the setup.log file]
\setup.log"
```

Where

- *[Path to the setup.iss file]* is the path to the **setup.iss** file you created in the previous procedure.
- *[Path to the setup.log file]* is the path to the log file that the InstallShield installation utility creates when it removes the software.

Cleaning the registry

When you remove a previous version of SMART Notebook software, the removal process can leave behind registry entries, preventing you from installing the latest version of the software.

CAUTION

Use caution when you open the Windows registry editor. If you incorrectly modify the Windows registry, you can damage your computer's operating system. Back up your registry before performing the following procedures.

If you're still having difficulties with remaining registry files, ensure that you have administrator rights and manually search the registry for SMART Notebook software, SMART Board software or SMART Product Drivers files.

CAUTION

Do not remove files for other SMART products you want to retain. If you are unsure, contact SMART Support (smarttech.com/contactsupport).

APPENDIX D

Removing previous versions of SMART Board software

To manually clean the registry

1. Press START+R.

The *Run* dialog box appears.

2. Type **regedit**, and click **OK**.

The *Registry Editor* window appears.

3. Locate SMART files in the following locations, and then delete them:

- **HKEY_CURRENT_USER\Software\SMART Technologies Inc.**
- **HKEY_LOCAL_MACHINE\Software\SMART Technologies Inc.**
- **HKEY_CURRENT_USER\Software\SMART Technologies**
- **HKEY_LOCAL_MACHINE\Software\SMART Technologies**

4. Close the *Registry Editor* window.

5. Restart your computer.

Index

3

3D Tools for SMART Notebook software 9, 45

A

activation 8, 21, 44
ActiveX 2-3, 19
administration content 47, 69
Administration mode 71
Adobe Flash Player 2-3, 19
Arabic 52, 57-58
arts content 47, 69

C

certificate file 51
Chinese 52, 57-58
command line interface 18
computer imaging 21
computer requirements 2
CPU 12, 49
culture content 48, 69
Customer Experience Program 11, 46
Czech 52, 57-58

D

Danish 52, 57-58
database 14
desktop icons 45
Diffie-Hellman encryption 51
DirectX 2
document camera See SMART Document
Camera

downloads 4
drivers
 Print Capture See Print Capture Driver
 SMART Document Camera 12, 49
 unsigned 52
Dutch 52, 57-58

E

education standards database 14
encryption 14, 51
English 53, 57-58
English content 48, 69
Essentials for Educators
 collection See Gallery Essentials
 collection
evaluation content 47, 69
examples
 Gallery command lines 70
 Windows Installer command lines 55

F

Finnish 53, 57-58
Flash See Adobe Flash Player
French 53, 57-58

G

Gallery content
 changing location of 71
 installing 62
 modifying 66
Gallery Essentials 62
geography content 48, 69
German 53, 57-58
GPU 12, 49

INDEX

Greek 53, 57-58

H

hard disk space 2
hardware acceleration 12, 49
Hebrew 53, 57-58
history content 48, 69
Hungarian 53, 57-58

I

imaging 21
Install Manager See SMART Install
Manager
Internet access 54
Italian 53, 57-58

L

language arts content 48, 69
language files 57
language setup 43
Lesson Activity Toolkit 62
Lesson Activity Toolkit collection 48

M

Malay 53, 58
Math Tools See SMART Notebook Math
Tools
mathematics content 48, 69
Microsoft .NET framework 3, 18
Microsoft Visual Studio Tools for Office 3, 18
MSI files 3, 32
MSP files 33
MST files 7, 43, 57
My Content folder 11, 48, 71

N

Norwegian 53, 57-58

notification area 50

P

parameters 54
people and culture content 48, 69
Polish 53, 57-58
Portuguese 57
prerequisites
 computer 2
 knowledge 1
Print Capture Driver 11, 49
product key 8, 44
protection software 21

R

RAM 2
recreation content 48, 69
renewable activations 25
requirements 2
Romanian 53, 57-58
Russian 53, 58-59

S

science content 48, 69
serial number See product key
service ports 14
shortcuts 45
Silent mode 54
SMART Document Camera 12, 49, 52
SMART Ink 52
SMART Install Manager
 about 5
 downloading 5
 installing 5
 using 6
SMART Notebook 8, 44
SMART Notebook Math Tools 9, 44
SMART Notebook SE 13, 50
SMART Product Drivers 8, 44
SMART Product Update 10, 45

INDEX

SMART Response 8, 44, 50
SMART Response CE 13, 50
SMART Response LE 13, 50
SMART Response PE 13, 50
SMART Response VE 13
SMART Response XE 13, 50
SMART Tools 51
SMART Vantage 15, 52
SNMP 15
Spanish 53, 58-59
special needs content 48, 69
sports content 48, 69
SSL digital certificates 14
startup 50-52
Swedish 53, 58-59
system recovery software 21

T

Tablet PC support 51
Team Content folders 48, 72
technology content 48, 69
third-party applications 20
Turkish 53, 58-59
tutorial file 12, 49

U

unsigned drivers 52
updates 31

W

Windows 7 operating system 2, 15, 51
Windows 8 operating system 2
Windows Installer 43
Windows operating systems 2
Windows XP operating system 2

X

XML 7

SMART Technologies

smarttech.com/support

smarttech.com/contactsupport

smarttech.com/kb/170504